


NEW



**diamond**  
led lighting®  
*lighting the future*

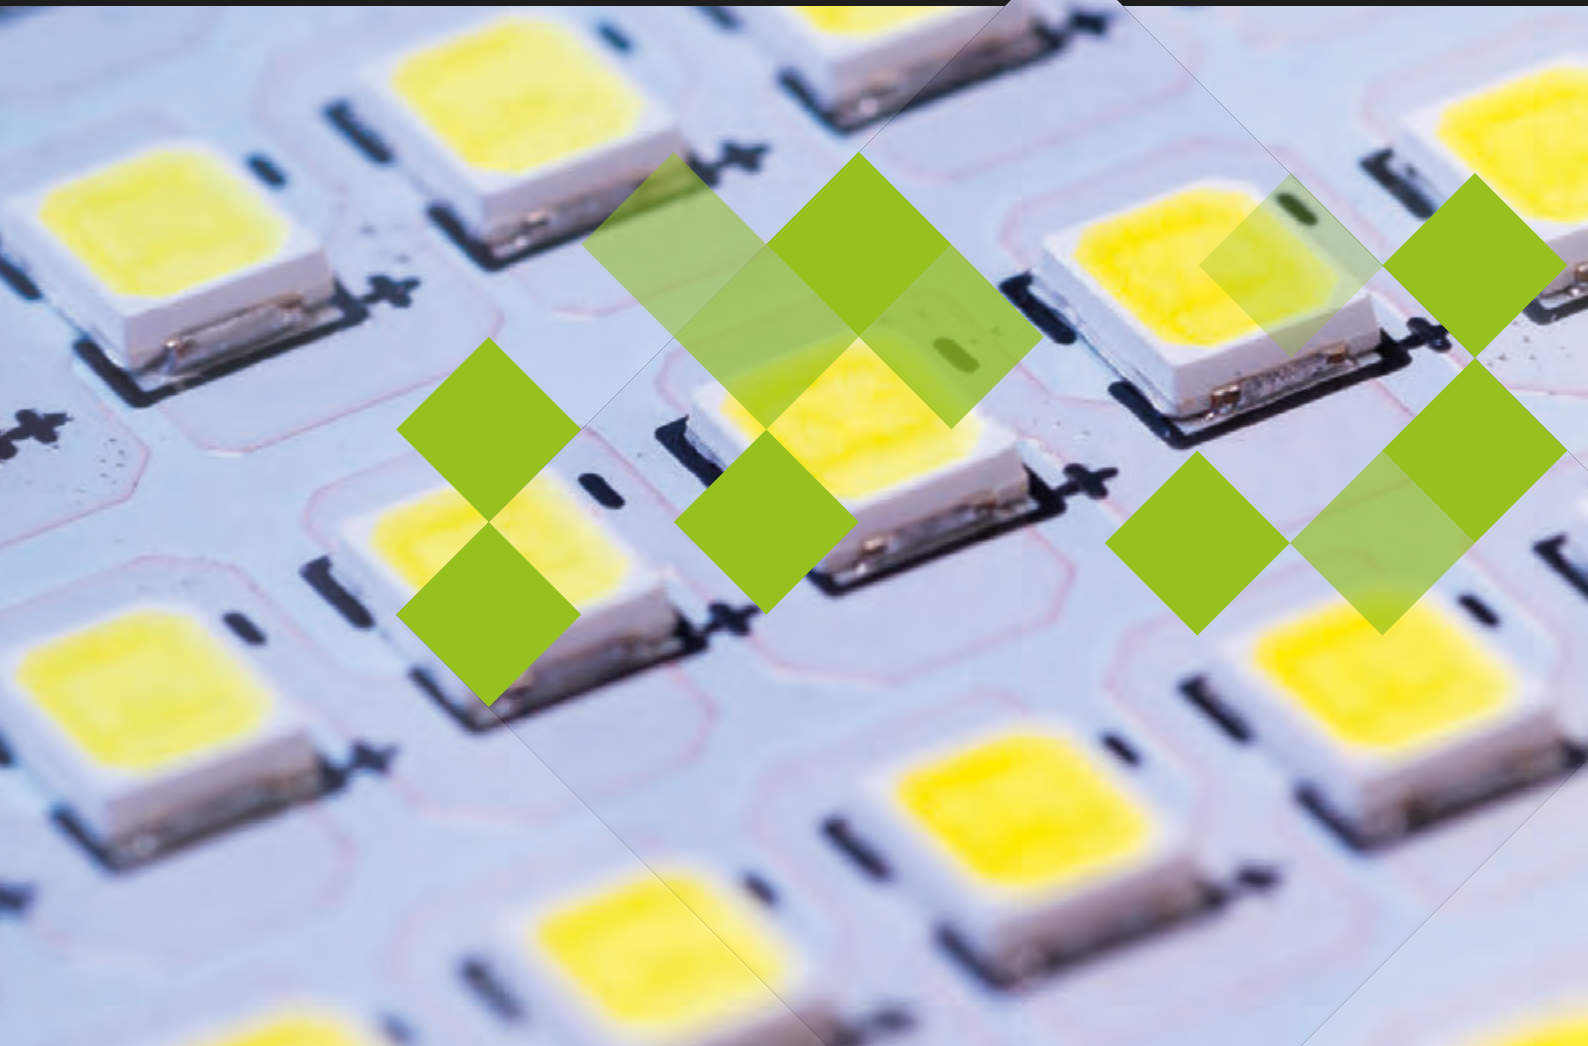

# Product Catalogue

## 12 v1

[www.diamondledlighting.co.uk](http://www.diamondledlighting.co.uk)

20  
**24**

# New Products in this issue



**Phoenix Slim Tri Colour 7**



**Phoenix Mini Tri Colour 8**



**Havana 11**




**Kestral Ceiling Light 12**




**Lunar I Solar Wall Light With PIR 14**




**Astra I Solar Street Light With PIR 16**

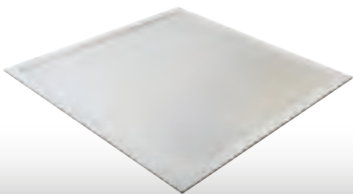

**Selene I 21**



**Moonstone VII 22**



**Falcon Tri Colour 24**



**Eclipse III Recessed Mount Round Downlight 25**



**Gawsworth V 29**



**Dunham II 34**



**Nano Shark 41**



**Midi Shark 41**



**High Bay Emergency 54**

**About Us 4****Bulkheads 5**

PH7	6
PH2, PHS	7
PHM, NO1	8
EM1, KE1	9
LA1, AX1	10
AT1, HA	11
KS1	12

**Solar 13**

LU1, LU3	14
AP1, HE1	15
AS1	16

**Office 17**

NS3	18
STR1	19
AL1, NE1	20
SE1, SE2	21
MS7	22

**Downlights 23**

FA1	24
EC3	25
MN1, GE2	26

**Industrial 27**

CH2	28
GA5	29
BE2	30

**Floodlights 31**

TA1	32
DU1	33
DU2	34
CE4, TA2	35
TA1P, TA2P	36
CO1, SX2	37
CE6	38
Floodlight Brackets	39

**Outdoor 40**

SB1	41
HE1	42
AS1	43
Street Light Brackets	44
Bollards	45

**Lamps 46**

LY3, TR	47
LY2, SC4	48
MG4, TT2	49

**Emergency 50**

CPEM, SCO2	51
ART, SEL	52
OD2, ZS	53
MS5, GA5-EM	54

**Sensors 55**

OP1, OP2	56,57
----------	-------

**Project Support Program 58****Marketing & POS 59**



## Our Vision

**To be innovative through new product development, offering the highest quality LED products at the best value. Dedicated supply and stock availability with outstanding levels of customer service and technical support.**

## Who We Are

**Diamond LED Lighting Ltd has been supplying energy efficient LED lighting to electrical wholesalers since 2008.**

We prioritise the development and quality testing of our products and maintain a large inventory to ensure quick delivery to our customers. All products are manufactured to our own specifications and procedures. With continuous improvement in both quality and function at the top of our priorities.

We offer various support packages to our resellers, including personalised marketing materials and prominent Point Of Sale displays. Our customers can expect a tailored support service, extensive product knowledge, and technical back up.

This catalogue showcases our latest products as well as our best selling ranges for your lighting needs.

All Items in this catalogue are carried in stock in our new warehouse facility in Newcastle under Lyme.

Our Sales team covers the whole of the UK, if you would like to arrange a visit to learn more about how we can help please contact our sales desk

## Our History

Diamond LED Lighting is part of DEL Group of companies, which started in 1979 with Diamond Electronics Ltd, originally a family business with a strong emphasis on technical ability, service and quality. Over the years the group has grown to include Electronic PCB subcontractors as well as Diamond LED Lighting, however we continue to promote the same values within all of our businesses.

## Symbols



**Beam angle**



**Input**



**Colour temperature**

Warm = 2600K - 3000K  
Natural = 4000K - 4500K  
Cool = 5000K - 6500K



**Dimmable**



**Life hours**



**Class II**

Diamond LED Lighting Ltd reserves the right to update product specifications without notice. Product supplied may differ slightly in appearance from images shown in this brochure.

The company shall not be liable for any errors or omissions. Full terms & conditions available upon request. Please refer to our website for the latest product information. For warranty conditions on specific products, please contact Sales with the part number.

# Bulkheads

---





# Phoenix VII Tri Colour, Tri Power

- Selectable 3 Colour Temperatures
- Selectable Power 10W,14W,18W
- 3 hour emergency version
- Replaces a 28W 2D
- Besa box mounting
- Microwave/Photocell Versions
- 3 year warranty & 2 years extended



Part Number	<b>PH7-18T (White)</b>
Max Power	18W
Max Lumens 18W	1600
Max Lumens 14W	1250
Max Lumens 10W	950
Dimensions (mm)	Ø316 x 74
Microwave	<b>PH7-18TMW</b>
3Hr Emergency	<b>PH7-18TEM</b>
3Hr Emergency AND Microwave	<b>PH7-18TEMMW</b>
Photocell	<b>PH7-18TPC</b>
Chrome Trim	<b>PH7-CHT</b>
Black Trim	<b>PH7-BKT</b>
Black Grill	<b>PH7-BKG</b>
Black Eyelid	<b>PH7-BKE</b>

CRI >80

IP 65





NEW

## Phoenix II Tri Colour, Tri Power

- Selectable 3 colour temperatures
- 3 selectable power options
- Besa box mounting
- 3 hour emergency version
- Replaces a 28W 2D
- Microwave/Photocell Versions
- 3 year warranty & 2 years extended



Part Number	<b>PH2-18T</b>
Selectable Wattage	10W 14W 18W
Max Power	18W
Max Lumens (18W)	1600
Dimensions (mm)	Ø 280 x 85
Microwave	<b>PH2-18TMW</b>
3Hr Emergency	<b>PH2-18TEM</b>
3Hr Emergency & Microwave	<b>PH2-18TEMMW</b>
Photocell	<b>PH2-18TPC</b>



CRI &gt;80

IP 65



NEW

TRI POWER COMING SOON

## Phoenix Slim Tri Colour, Tri Power

- Selectable 3 colour temperatures
- 3 hour emergency version
- Replaces a 28W 2D
- Microwave/Photocell Versions
- 2 year warranty



Part Number	<b>PHS-10T (White)</b>
Max Power	13W
Max Lumens	1100
Dimensions (mm)	Ø 320 x 80
Microwave	<b>PHS-10TMW</b>
3Hr Emergency	<b>PHS-10TEM</b>
3Hr Emergency & Microwave	<b>PHS-10TEMMW</b>
Photocell	<b>PHS-10TPC</b>



CRI &gt;80

IP 65





**NEW**

# Phoenix Mini Tri Colour

- Selectable 3 colour temperatures
- Besa box mounting
- 3 hour emergency version
- Replaces a 16W 2D
- 2 year warranty

120°	220-240V	25,000	No	3000K 4000K 5000K



Part Number	PHM-12T (White)	PHM-12TC (Chrome)
Max Power	12W/8W	12W/8W
Max Lumens	1100 (12W)/730 (8W)	1100 (12W)/730 (8W)
Dimensions (mm)	Ø 250 x 90	Ø 250 x 90
Microwave	PHM-12TMW	PHM-12TCMW
3Hr Emergency	PHM-12TEM	PHM-12TCEM
3Hr Emergency & Microwave	PHM-12TEMMW	PHM-12TCEMMW
Photocell	PHM-12TPC	PHM-12TCPC


# Nobel Mini Bulkhead

- Suitable for external use
- IK08 impact rating
- 3 year warranty

120°	220-240V	30,000	No	4000K

	Full	Eyelid
White Casing	NO1-NW	NO1-NEW
Black Casing	NO1-NB	NO1-NEB
Watt	6W	6W
Max Lumens	600	500
Dimensions (mm)	Ø 215 x 77	Ø 203 x 79
Photocell White Casing	NO1-NWPC	NO1-NEWPC
Photocell Black Casing	NO1-NBPC	NO1-NEBPC






# Empire Bulkhead

- Suitable for External Use
- IK08 impact rating
- 3 hour emergency version
- 3 Year Warranty
- Microwave version available
- MW and EM packs not available together for Eyelid



	Full	Eyelid
White Casing	EM1-NW	EM1-NEW
Black Casing	EM1-NB	EM1-NEB
Power Rating	12W	12W
Max Lumens	1000	800
Dimensions (mm)	Ø300 x 90	Ø300 x 93
Photocell White Casing	EM1-NWPC	EM1-NEWPC
Photocell Black Casing	EM1-NBPC	EM1-NEBPC



CRI &gt;80

IP 66



# Kensington

- Wall Pack
- Ideal for coastal locations
- IK08
- 3 year warranty



Part Number	KE1-NB
Watt	30W
Colour	Natural
Max Lumens	2200
Dimensions (mm)	310 x 265 x 122
Microwave	KE1-NBMW
Emergency	KE1-NBEM
Photocell	KE1-NBPC



CRI &gt;80

IP 65



# Lambeth Bulkhead

- 3 year warranty



120°



220-240V



30,000



No



4000K

Part Number	LA1-NW	LA1-NB
Watt	5W	5W
Colour	Natural	Natural
Casing	White	Black
Max Lumens	450	450
Dimensions (mm)	169 x 115 x 76	169 x 115 x 76



CRI >80

IP 65

# Axiom Bulkhead

- Opal diffuser
- 3 year warranty



120°



180-240V



30,000



No



4000K

Part Number	AX1-NB
Watt	10W
Colour	Natural
Max Lumens	900
Dimensions (mm)	240 x 116 x 110



CRI >80

IP 65

# Athena Bulkhead

- Suitable for external use
- 3 year warranty



120°



180-240V



30,000



No



4000K

Standard	<b>AT1-NB</b>
PIR Version	<b>AT1-NB-PIR</b>
Watt	6W
Max Lumens	700
Dimensions (mm)	267 x 113 x 108



CRI &gt;80

IP 44

# Havana

- E27 Socket
- Screwless design
- Easy Installation
- IP66 dust and waterproof
- Replaces a 28W 2D
- 2 year warranty



120°



220-240V



No

Part Number	<b>HA1-E27</b>	<b>HA2-E27</b>
E27 Fittings	1	2
Watt	20W (max)	20W (max)
Dimensions (mm)	Ø 260 x 87	Ø 260 x 87



NEW

IP 66

# Kestral Ceiling Light

**NEW**

- Selectable 3 colour temperatures
- IK10
- Emergency Available
- Replaces a 28W 2D
- Microwave Version Available
- 5 year warranty



120°



220-240V



50,000



No



3CCT



**CRI >80**

**IP 65**

	White	Black
Part Number	<b>KS1-15W</b>	<b>KS1-15B</b>
Max Power	15W	15W
Max Lumens	1500	1500
Dimensions (mm)	Ø302 x 67.5	Ø302 x 67.5
Microwave	<b>KS1-15WMW</b>	<b>KS1-15BMW</b>
3Hr Emergency	<b>KS1-15WEM</b>	<b>KS1-15BEM</b>

**IP 66**

# Solar

---





NEW

# Lunar I Solar Wall Light With PIR

- Easy installation no wire required
- Full charge time as low as 6 hours in bright sunlight
- 3 modes LOW ON /FULL ON /PIR
- 1. ON (80lm)
- 2. FULL (400lm)
- 3. PIR (400lm)
- Li-ion Battery: 2000mAh /3.7V, replaceable
- 2 year warranty
- Mono-crystalline Silicon Housing Material: ABS+PC, anti-UV,



Part Number	<b>LU1-3.2CB</b>
Watt	3.2W
Max Lumens	400
Dimensions (mm)	212 x 140 x 109
PIR Detection	120° (5-8m)
Modes	LOW ON/FULL ON/PIR



IP 65

# Lunar III Solar Wall Light

- Works up to 8 hrs on full charge
- Full charge time as low as 6 hrs in bright sunlight
- 3 Modes
  1. On Low (12lm)
  2. On Full (180lm)
  3. PIR (180lm)
- Battery 3 x AAA 600mAh 1.2V Ni-MH
- Polycrystal solar panel
- 2 year warranty (Fitting)
- 1 year warranty (Battery)



Part Number	<b>LU3-PIR</b>
Watt	4W
Max Lumens	180
Dimensions (mm)	108 x 200 x 65
PIR Detection	110° (5-8m)



IP 65

# Apollo Solar

- Works up to 8 hrs in mode 1
- Replaceable battery
- Full charge time as low as 6 hrs in bright sunlight
- 3 Modes
  1. Low Light (10lm)
  2. PIR - Medium Light (100lm)
  3. PIR - Full Light (450lm)
- Battery 1 x 2000mAh 7.4V Li-Ion
- 2 year warranty



Solar



25,000



PIR



Cordless



4000K



IP 44

Part Number **API-PIR**

Watt 8.5W

Max Lumens 450

Dimensions (mm) 210 x 90 x 105

PIR Detection 100° (5-8m)

# Helios Solar

- Works up to 8 hrs in mode 1
- Full charge time as low as 6 hrs in bright sunlight
- 3 Modes
  1. Low Light (12lm)
  2. PIR - Medium Light (50lm)
  3. PIR - Full Light (200lm)
- Battery 1 x 2000mAh 3.7V Li-Ion
- 2 year warranty



Solar



25,000



PIR



Cordless



4000K



IP 44

Part Number **HE1-PIR**

Watt 5W

Max Lumens 200

Dimensions (mm) 160 x 207 x 287

PIR Detection 120° (5-8m)



# Astra I Solar Street Light With PIR

- Easy installation no wire required
- Asymmetric Lens
- Up to 3 day Autonomous Time
- 12Ah Battery LifePO4
- Photocell and PIR
- Mono-crystalline Panel ABS Casing
- 3 year warranty



Solar



30,000



PIR



Cordless



6500K



**IP 65**

Part Number	<b>AS1-1200C</b>
Watt	11W
Max Lumens	1200
Dimensions (mm)	450 x 210 x 80
PIR Detection	120° (5-8m)



# Office





# Nova III Slim Tri Colour

- Selectable 3 Colour Temperatures
- Open end cap
- Mains loop in and out
- Linkable
- Integrated, low flicker driver
- Supplied with fixing kit
- Surface screw or suspended hook mount
- 3 year warranty



120°



220-240V



30,000



No




3000K 4000K 6500K

Part Number	NS3-4T	NS3-5T	NS3-6T
Max Power	40W	45W	55W
Colour	3 CCT	3 CCT	3 CCT
Max Lumens	4120	5050	5750
Dimensions (mm)	1200 x 78 x 36 (4ft)	1500 x 78 x 36 (5ft)	1800 x 78 x 36 (6ft)

CRI >80

IP 20

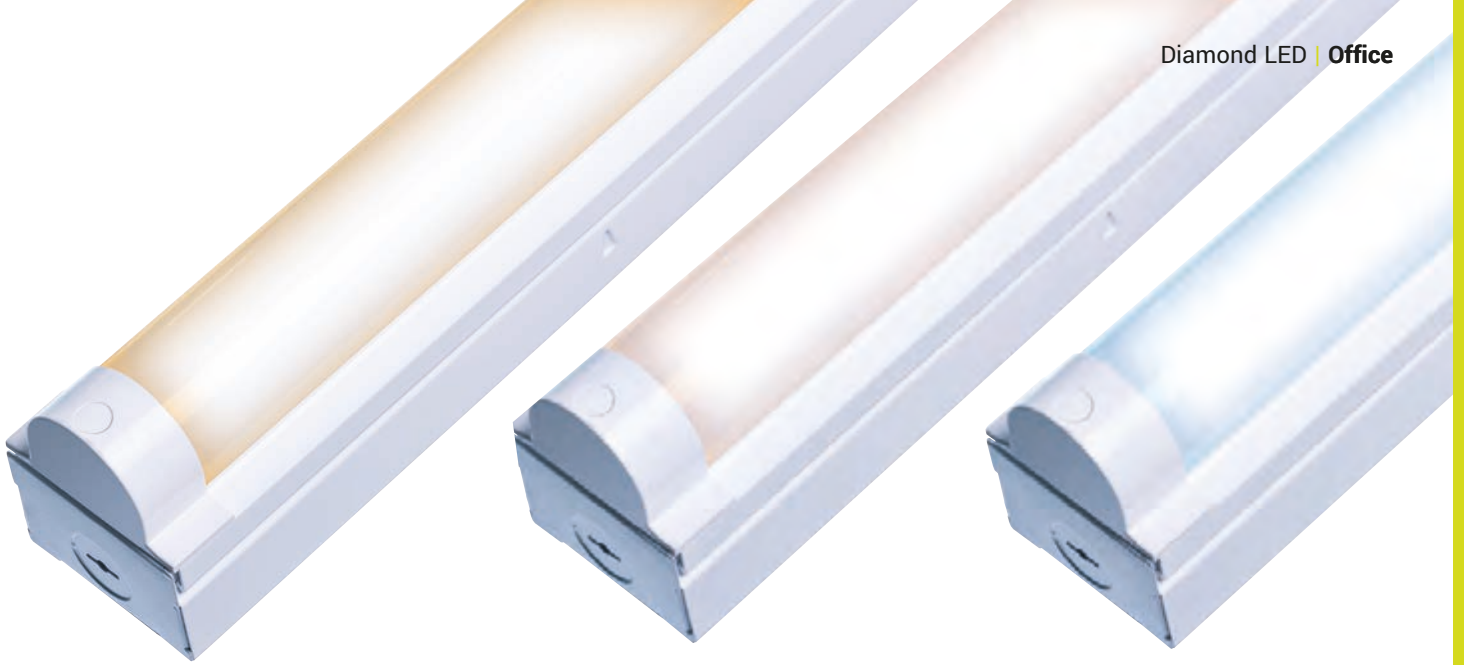

## Trinity Tri Colour

- Selectable 3 colour temperatures
- Flicker free
- Direct replacement for fluorescent battens
- Matt white finish
- 5 year warranty



120°



220-240V



50,000



No

3000K 4000K  
6500K

CRI &gt;80

IP 20



Emergency

	2ft Twin	4ft Single	4ft Twin	5ft Single	5ft Twin	6ft Single	6ft Twin
Part Number	<b>STR1-2T</b>	<b>STR1-4S</b>	<b>STR1-4T</b>	<b>STR1-5S</b>	<b>STR1-5T</b>	<b>STR1-6S</b>	<b>STR1-6T</b>
Max Power	20W	30W	40W	35W	55W	40W	60W
Colour	3 CCT	3 CCT	3 CCT	3 CCT	3 CCT	3 CCT	3 CCT
Max Lumens	2450	3250	4600	3950	5750	4650	6450
Dimensions (mm)	658 x 62 x 72	1227 x 62 x 72	1227 x 62 x 72	1527 x 62 x 72	1527 x 62 x 72	1791 x 62 x 72	1791 x 62 x 72
Microwave	<b>STR1-2TMW</b>	<b>STR1-4SMW</b>	<b>STR1-4TMW</b>	<b>STR1-5SMW</b>	<b>STR1-5TMW</b>	<b>STR1-6SMW</b>	<b>STR1-6TMW</b>
3hr Emergency	<b>STR1-2TEM</b>	<b>STR1-4SEM</b>	<b>STR1-4TEM</b>	<b>STR1-5SEM</b>	<b>STR1-5TEM</b>	<b>STR1-6SEM</b>	<b>STR1-6TEM</b>
3hr Emergency and Microwave	<b>Not Available</b>	<b>STR1-4SEMMW</b>	<b>STR1-4TEMMW</b>	<b>STR1-5SEMMW</b>	<b>STR1-5TEMMW</b>	<b>STR1-6SEMMW</b>	<b>STR1-6TEMMW</b>



## Alpha I Tri Colour

- Selectable 3 Colour Temperatures
- Emergency, Microwave & Emergency Microwave available
- Surface screw or suspended hook mount
- Flicker free
- Steel body, white gloss finish
- 5 year warranty



110°



220-240V



50,000



No

3000K 4000K  
5000K

	4ft	5ft	6ft
Part Number	<b>AL1-40T</b>	<b>AL1-50T</b>	<b>AL1-60T</b>
Max Power	40W	55W	60W
Max Lumens	5000	6500	6750
Dimensions (mm)	1200 x 208 x 70	1500 x 208 x 70	1800 x 208 x 70
Microwave	<b>AL1-40TMW</b>	<b>AL1-50TMW</b>	<b>AL1-60TMW</b>
3 Hr Emergency	<b>AL1-40TEM</b>	<b>AL1-50TEM</b>	<b>AL1-60TEM</b>
3 Hr Emergency & Microwave	<b>AL1-40TEMMW</b>	<b>AL1-50TEMMW</b>	<b>AL1-60TEMMW</b>

CRI &gt;80



IP 20



## Nera Linkable Cabinet Lights

- Selectable 3 Colour Temperatures
- Integral Driver
- Directly Linkable to any length
- Additional Link Cables Available
- Side Mounted On/Off Switch
- Fixing Clips Included
- Supplied Complete with 1m Mains Cable
- 3 year warranty



120°



220-240V



30,000



No

3000K 4000K  
5000K

	1ft	2ft	3ft	4ft	5ft
Part Number	<b>NE1-1T</b>	<b>NE1-2T</b>	<b>NE1-3T</b>	<b>NE1-4T</b>	<b>NE1-5T</b>
Max Power	4W	8W	10W	14W	18W
Colour	3 CCT	3 CCT	3 CCT	3 CCT	3 CCT
Max Lumens	450	900	1050	1550	1950
Dimensions (mm)	313 x 22 x 30	573 x 22 x 30	873 x 22 x 30	1173 x 22 x 30	1473 x 22 x 30
Link Cables	250mm	500mm	1000mm		
Part Number	<b>NE1-C250MM</b>	<b>NE1-C500MM</b>	<b>NE1-C1000MM</b>		

CRI &gt;80

IP 20



NEW

## Selene I Tri Colour Panel

- Selectable 3 Colour Temperatures
- Dimmable Available
- Flicker free
- Steel body, white gloss finish
- 5 year warranty



120°



220-240V



50,000



No

3000K 4000K  
6500K

Tp(b)

Part Number	SE1B-36T
Max Power	36W
Max Lumens	3800
Dimensions (mm)	595 x 595 x 33

CRI &gt;80

IP 40



Emergency



NEW

## Selene II Tri Colour Dual Power Panels

- Selectable 3 colour temperatures
- Selectable Power Option
- Back Lit Panel
- Dimmable Available
- Fire Rated to Tp(a) or Tp(b)
- No Light Guide
- Flicker free
- Surface Mount Kit SE1-CWM
- 5 year warranty



110°




220-240V



50,000



No

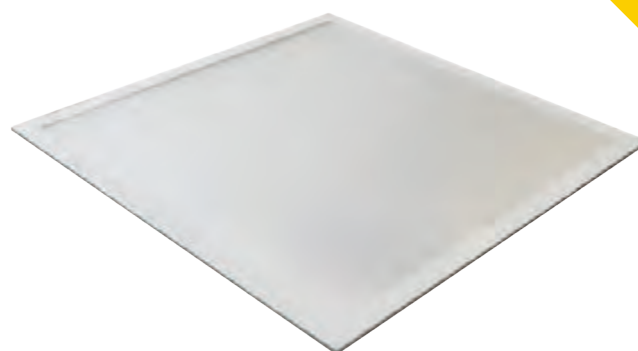3000K 4000K  
5700K

CRI &gt;80

IP 20



Emergency

Emergency Kit

Part Number	SE2A-36T	SE2B-36T	SE2B-126T	SE2B-123T	SE-EM3W
Max Power	25/36W	25/36W	38/56W	25/36W	Function Self Test
Max Lumens	3600	3600	5600	3600	Panel Power 25-60W
Dimensions (mm)	595 x 595 x 25	595 x 595 x 25	1195 x 595 x 33	1195 x 295 x 33	Output Voltage 9-80W

NEW

# Moonstone VII

- UGR19 LED Panel 4000K
- Back Lit Panel
- Fire Rated to Tp(b)
- Flicker free
- Dimmable Available
- 5 year warranty



160°



220-240V



50,000



No



4000K



CRI >80

IP 40



Part Number	<b>MS7-66NUA</b>
Max Power	36W
Max Lumens	3708
Dimensions (mm)	595 x 595 x 33

# Downlights

---




# Falcon Tri Colour

**NEW**  
 NOW AVAILABLE –  
 CONTRACTOR PACKS OF 10PCS\*

- Selectable 3 colour temperatures
- Selectable Power Rating 5W or 8W
- Fully fire rated for each 30, 60 and 90min
- Low Profile
- Easy Fit Connector
- 3 year warranty
- **Coloured Clip on Bezels also available separately**

\*Please order FA1-8T10P

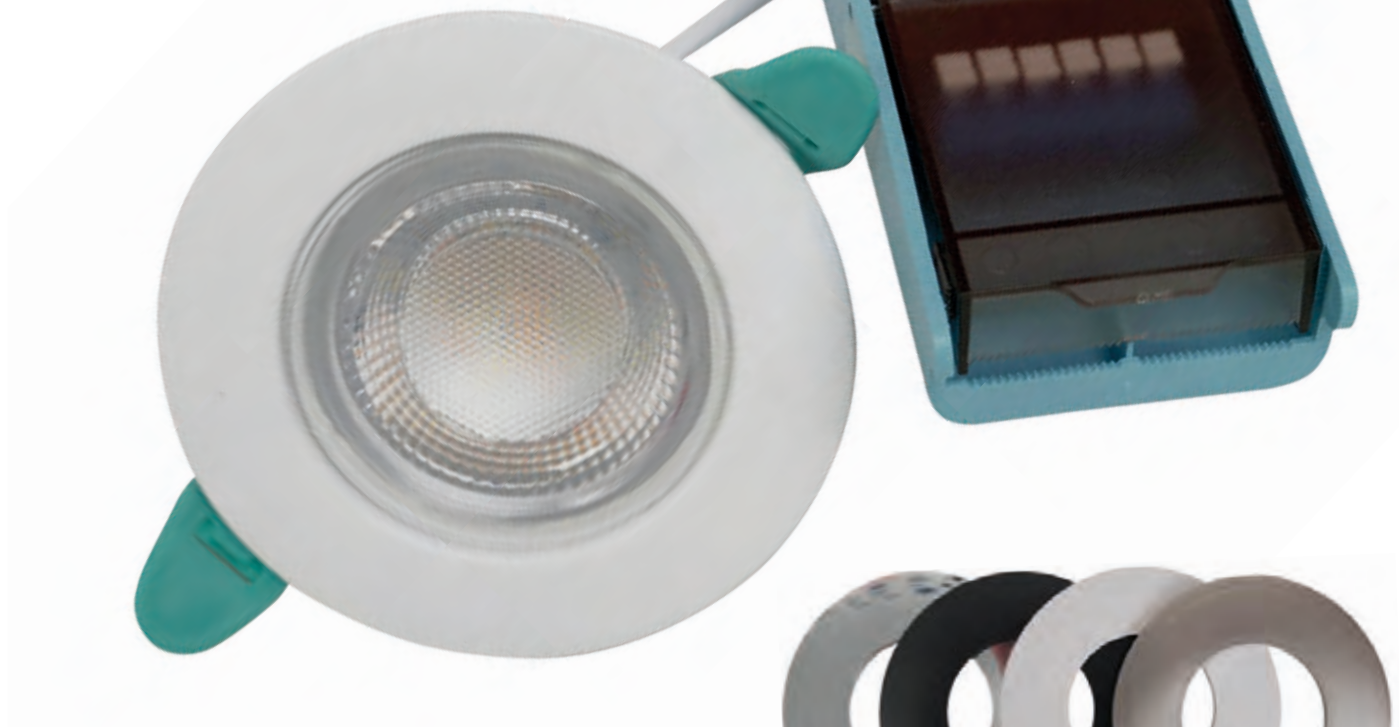

				
60°	220-240V	30,000	Yes	3000K 4000K 6500K

Part Number	<b>FA1-8T</b>	
10 Pack	<b>FA1-8T10P</b>	
Bezel	White	
Watt	5W/8W	
Dimensions (mm)	Ø95 x 53	
Cut Out (mm)	Ø70	
	Switched to 5W	Switched to 8W
Max Lumens	570	860
Separate Bezels	Clip On	
Brushed Chrome	FA1-BCB	
Chrome	FA1-CB	
Black	FA1-BKB	
White Bezel	FA1-WHB	
Antique Brass Bezel	FA1-ABB	


**CRI >80**  
**IP 65**



# Eclipse II Recessed Mount Round Downlight

NEW

- 4000K, other options available
- 9W, 12W, 15W 18W available
- Class II Fitting
- Suitable to replace PL and 2D lights
- 3 year warranty

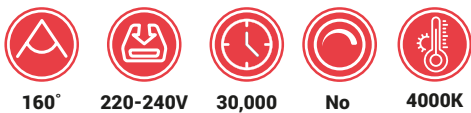

160°

220-240V

30,000

No

4000K

CRI &gt;80

IP 40

Part Number	EC3-094K	EC3-124K	EC3-154K	EC3-184K
Watt	9W	12W	15W	18W
Dimensions (mm)	Ø105	Ø155	Ø155	Ø205

# Moreton Fire Rated Can

- Optimized thermal cooling for longer lamp life
- Push-in terminal, loop in loop out
- Fully Fire Rated for each 30, 60 and 90min
- Interchangeable bezel
- Compliant with building regulations
- 3 Yr Warranty



Part Number	<b>MN1-WH</b>	<b>Bezels also available separately</b>	
Bezel	White	Chrome Bezel	<b>MNB-CH</b>
Dimensions (mm)	Ø85 x106	Brushed Chrome Bezel	<b>MNB-BC</b>
Cut Out (mm)	Ø70		

**IP 65**

# Gemini II

- Driver included
- Indoor use
- Wide beam angle
- Not suitable for accent lighting
- 3 year warranty



	<b>Warm (3000K)</b>	<b>Cool (6500K)</b>
Chrome	<b>GE2-DLC-W</b>	<b>GE2-DLC-C</b>
White	<b>GE2-DLW-W</b>	<b>GE2-DLW-C</b>
Brushed Chrome	<b>GE2-DLBC-W</b>	<b>GE2-DLBC-C</b>
Watt	8W	8W
Max Lumens	580	600
Cut-Out (mm)	Ø 77	Ø 77
Dimensions (mm)	Ø 98 x 40	Ø 98 x 40



# Industrial

---



# Chatsworth II

- Now with stainless steel clips as standard
- Polycarbonate construction
- Non corrosive
- Suitable for indoor or outdoor use
- Complete with fixing accessories
- 3 year warranty

  
**120°**

  
**220-240V**

  
**30,000**

  
**No**

  
**4000K**



CRI >80

IP 65


Emergency

	4ft Single	4ft Twin	5ft Single	5ft Twin	6ft Single	6ft Twin
Part Number	<b>CH2-4SN</b>	<b>CH2-4TN</b>	<b>CH2-5SN</b>	<b>CH2-5TN</b>	<b>CH2-6SN</b>	<b>CH2-6TN</b>
Power Rating	20W	42W	32W	65W	40W	70W
Max Lumens	2200	4800	3500	7200	4000	7900
Dimensions (mm)	1270 x 70 x 75	1270 x 110 x 72	1565 x 70 x 75	1565 x 110 x 72	1867 x 70 x 75	1867 x 110 x 72
Microwave	<b>CH2-4SNMW</b>	<b>CH2-4TNMW</b>	<b>CH2-5SNMW</b>	<b>CH2-5TNMW</b>	<b>CH2-6SNMW</b>	<b>CH2-6TNMW</b>
3hr Emergency	<b>CH2-4SNEM</b>	<b>CH2-4TNEM</b>	<b>CH2-5SNEM</b>	<b>CH2-5TNEM</b>	<b>CH2-6SNEM</b>	<b>CH2-6TNEM</b>
3hr Emergency and Microwave	<b>CH2-4SNEMMW</b>	<b>CH2-4TNEMMW</b>	<b>CH2-5SNEMMW</b>	<b>CH2-5TNEMMW</b>	<b>CH2-6SNEMMW</b>	<b>CH2-6TNEMMW</b>

# Gawsworth V

NEW

- Multipower Wattage Selectable
- Suspension kit = **GA-SUSKIT**
- Plug in Microwave Available
- Emergency Pack Available = **GA5-EM**
- 5 year warranty



Part Number	GA5S-150C	GA5S-200C
Watt	90W, 120W, 150W	120W, 160W, 200W
Lumens	20400 (max)	26400 (max)
Dimensions (mm)	Ø280 x 158	Ø330 x 168
Microwave (Plug in)	GA5-MW	
Microwave Remote Control	GA5-MWRC	
Emergency Pack	GA5-EM	

# Beeston II

- Suspension kit = **BE-SUSKIT**
- Microwave version available
- Emergency pack available
- Step dimming available
- High bay / Low bay
- 5 year warranty



120°



220-240V



50,000



No



4000K



Available with diffuser




Part Number	<b>BE2-100C</b>	<b>BE2-165C</b>	<b>BE2-225C</b>
Watt	90W	160W	215W
Max Lumens	15000	26500	36000
Max Lumens Diffuser	14000	24500	33500
Dimensions (mm)	606 x 320 x 53	606 x 440 x 53	1165 x 440 x 53
<b>With Frosted Diffuser</b>	<b>BE2-100CFD</b>	<b>BE2-165CFD</b>	<b>BE2-225CFD</b>
<b>With Shatterproof Diffuser</b>	<b>BE2-100CSFD</b>	<b>BE2-165CSFD</b>	<b>BE2-225CSFD</b>
<b>Microwave</b>	<b>BE2-100CMW</b>	<b>BE2-165CMW</b>	<b>BE2-225CMW</b>
<b>3Hr Emergency</b>	<b>BE2-100CEM</b>	<b>BE2-165CEM</b>	<b>BE2-225CEM</b>
<b>3Hr Emergency &amp; Microwave</b>	<b>BE2-100CEMMW</b>	<b>BE2-165CEMMW</b>	<b>BE2-225CEMMW</b>
Wireguard	BE2-100WIREGUARD	BE2-165WIREGUARD	BE2-225WIREGUARD

CRI >80

IP 20



Emergency

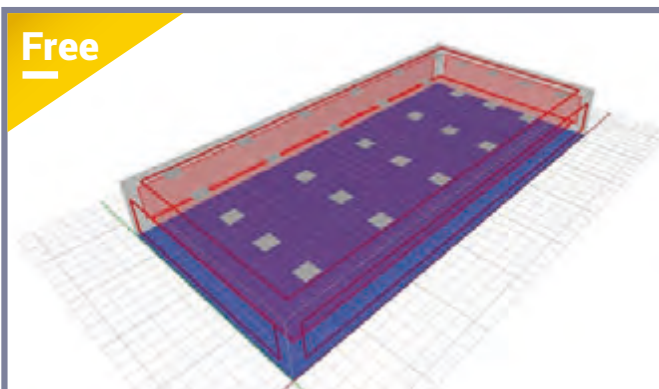

Free

## Lighting & Energy Calculation Service Available

Contact us for further information

# Floodlights

---



# Tatton Slimline

- Angled bracket for easy installation
- Supplied with 1m cable
- For connectors and brackets - see page 33
- 2 year warranty



110°



200-240V



25,000



No



6500K

**PIR with 4th WIRE for manual override or slave**



All Tatton Floodlights include an angled bracket for easy installation

Without PIR (IP65)	TA1-10C	TA1-20C	TA1-30C	TA1-50C
With PIR (IP65)	TA1-10CP	TA1-20CP	TA1-30CP	TA1-50CP
Max Power	10W	20W	30W	50W
Max Lumens	1100	2200	3500	6150
Dimensions (mm)				
Without PIR	104 x 125 x 27	125 x 152 x 28	168 x 209 x 27	200 x 237 x 36
With PIR	104 x 165 x 55	125 x 189 x 55	168 x 252 x 54	200 x 287 x 57

**CRI >80**

**IP 65**





## Dunham Tri Colour

- Selectable 3 Colour Temperatures
- Colour selected maintained during power off
- Remote control adjusts the temperature
- Angled bracket for easy installation
- Supplied with 1m cable
- 2 year warranty



110°



220-240V



25,000



Yes

3000K 4000K  
5000K

All Dunham Floodlights include an angled bracket for easy installation



### PIR with 4th WIRE for manual override or slave

CRI &gt;80

IP 65

Without PIR (IP65)	DU1-10T	DU1-20T	DU1-30T	DU1-50T
With PIR (IP65)	DU1-10TP	DU1-20TP	DU1-30TP	DU1-50TP
Max Power	10W	20W	33W	50W
Max Lumens	1100	2200	3300	5500
Dimensions (mm)				
Without PIR	101 x 125 x 28.5mm	129 x 151 x 29.5mm	163 x 186 x 34mm	201 x 227 x 37mm
With PIR	101 x 157 x 54mm	129 x 183 x 57mm	163 x 212 x 61mm	201 x 257 x 63mm

**NEW**

# Dunham II

- PIR with 4th WIRE for manual override or slave
- Selectable 3 Colour Temperatures
- Angled bracket for easy installation
- 2KV Surge protection on non PIR
- Supplied with 1m cable
- 2 year warranty



See Table



220-240V



25,000



No



3000K 4000K  
6500K



**CRI >80**

**IP 65**

Black Casing Without PIR (IP65)	DU2B-10T	DU2B-20T	DU2B-30T	DU2B-50T
Black Casing With PIR (IP65)	DU2B-10TP	DU2B-20TP	DU2B-30TP	DU2B-50TP
White Casing Without PIR (IP65)	DU2W-10T	DU2W-20T	DU2W-30T	DU2W-50T
White Casing With PIR (IP65)	DU2W-10TP	DU2W-20TP	DU2W-30TP	DU2W-50TP
Max Power	11W	20W	30W	50W
Max Lumens	1200	2300	3500	5600
Beam Angle	110°	110°	110°	110°
Dimensions (mm)	104 x 125 x 27	125 x 152 x 28	168 x 209 x 27	200 x 237 x 36
Dimensions (mm) with PIR	104 x 165 x 55	125 x 189 x 55	168 x 252 x 54	200 x 287 x 57

# Celsian IV SMD 80-200W

- SMD LED with driver on board
- High quality heatsink design
- Recommended for outdoor use
- 2 year warranty



Part Number	CE4S-80C	CE4S-100C	CE4S-150C	CE4S-200C
Watt	80W	100W	150W	200W
Max Lumens	7900	8200	13000	17000
Dimensions (mm)	350 x 251 x 76	350 x 251 x 76	487 x 217 x 77	537 x 411 x 81

CRI &gt;80

IP 65

# Tatton II Slim 80-300W

- Polycarbonate Front
- SMD LED with Driver on Board
- Recommended for outdoor use
- Angled Bracket for easy Installation
- See Floodlight Accessories page 34 for Connectors and Brackets
- 2 Year Warranty



Part Number	TA2-80C	TA2-100C	TA2-150C	TA2-200C	TA2-300C
Watt	80W	100W	150W	200W	300W
Max Lumens	8800	11000	16500	22000	33000
Dimensions (mm)	303 x 356 x 70	303 x 356 x 70	364 x 421 x 72	364 x 421 x 72	429 x 471 x 70

CRI &gt;80

IP 65

# Tatton I Photocell

- Dusk to Dawn Operation
- Angled bracket for easy installation
- Supplied with 1m cable
- Connectors and brackets available



Part Number	TA1P-30C	TA1P-50C
Power Rating	30W	50W
Max Lumens	3500	6150
Dimensions (mm)	168 x 199 x 27	200 x 237 x 36

CRI >80  
IP 65

# Tatton II Photocell

- Polycarbonate Front
- SMD LED with driver on board
- Recommended for outdoor use
- Dusk to Dawn Operation
- Angled bracket for easy installation
- 2 year warranty



Part Number	TA2P-80C	TA2P-100C	TA2P-150C
Power Rating	80W	100W	150W
Lumens	8800	11000	18500
Dimensions (mm)	303 x 356 x 70	303 x 356 x 70	364 x 421 x 72

CRI >80  
IP 65

# Coastal & Anti-Corrosive

- Suitable for use in harsh environments
- Supplied with 1m cable
- For connectors and brackets - see page 33
- Manufactured and approved to withstand corrosive and marine environments
- Contact sales for resistance specification
- Recommended for outdoor and industrial use
- 5 year warranty



110°



100-240V



50,000



No



6500K



Part Number	CO1-3000C	CO1-5000C	CO1-8000C
Watt	30W	50W	80W
Max Lumens	3000	5000	7600
Dimensions(mm)	225 x 185 x 125	288 x 238 x 150	288 x 360 x 110

CRI &gt;70

IP 66

# Remote Control Floodlights

## Saxon II RGB

- Setting retained when power off
- Full IR remote control
- 340° bracket rotation
- Supplied with 1m cable
- Recommended for outdoor use
- Connectors and brackets available
- 3 year warranty



120°



100-240V



30,000



No



RGB



Part Number	SX2-30RGB
Power Rating	30W
Max Lumens	1080
Dimensions (mm)	283 x 263 x 42

IP 65

# Portable Floodlights

## Celsian VI Portable Flood

- Portable work light
- USB Chargeable
- Includes AC adaptor and USB Charging Lead
- Charge time 6hrs
- Operating time 3hrs
- 2yr warranty



120°



4.2-12VDC



20,000



No



6000K

Part Number	CE6-10CBY
Power Rating	10W
Max Lumens	850
Dimensions (mm)	220 x 225 x 55



CRI >70

IP 44

## Accessories


### Connectors



Part Number	CE-CONN2	CE-TCONNECTOR
Poles	3	3
Max Current	16A	16A
Max Conductor	4mm <sup>2</sup>	4mm <sup>2</sup>
Min Cable	7mm	7mm
Max Cable	13.5mm	13.5mm
Dimensions (mm)	81 x 24	80 x 98

IP 68

# Brackets and Ground Spikes

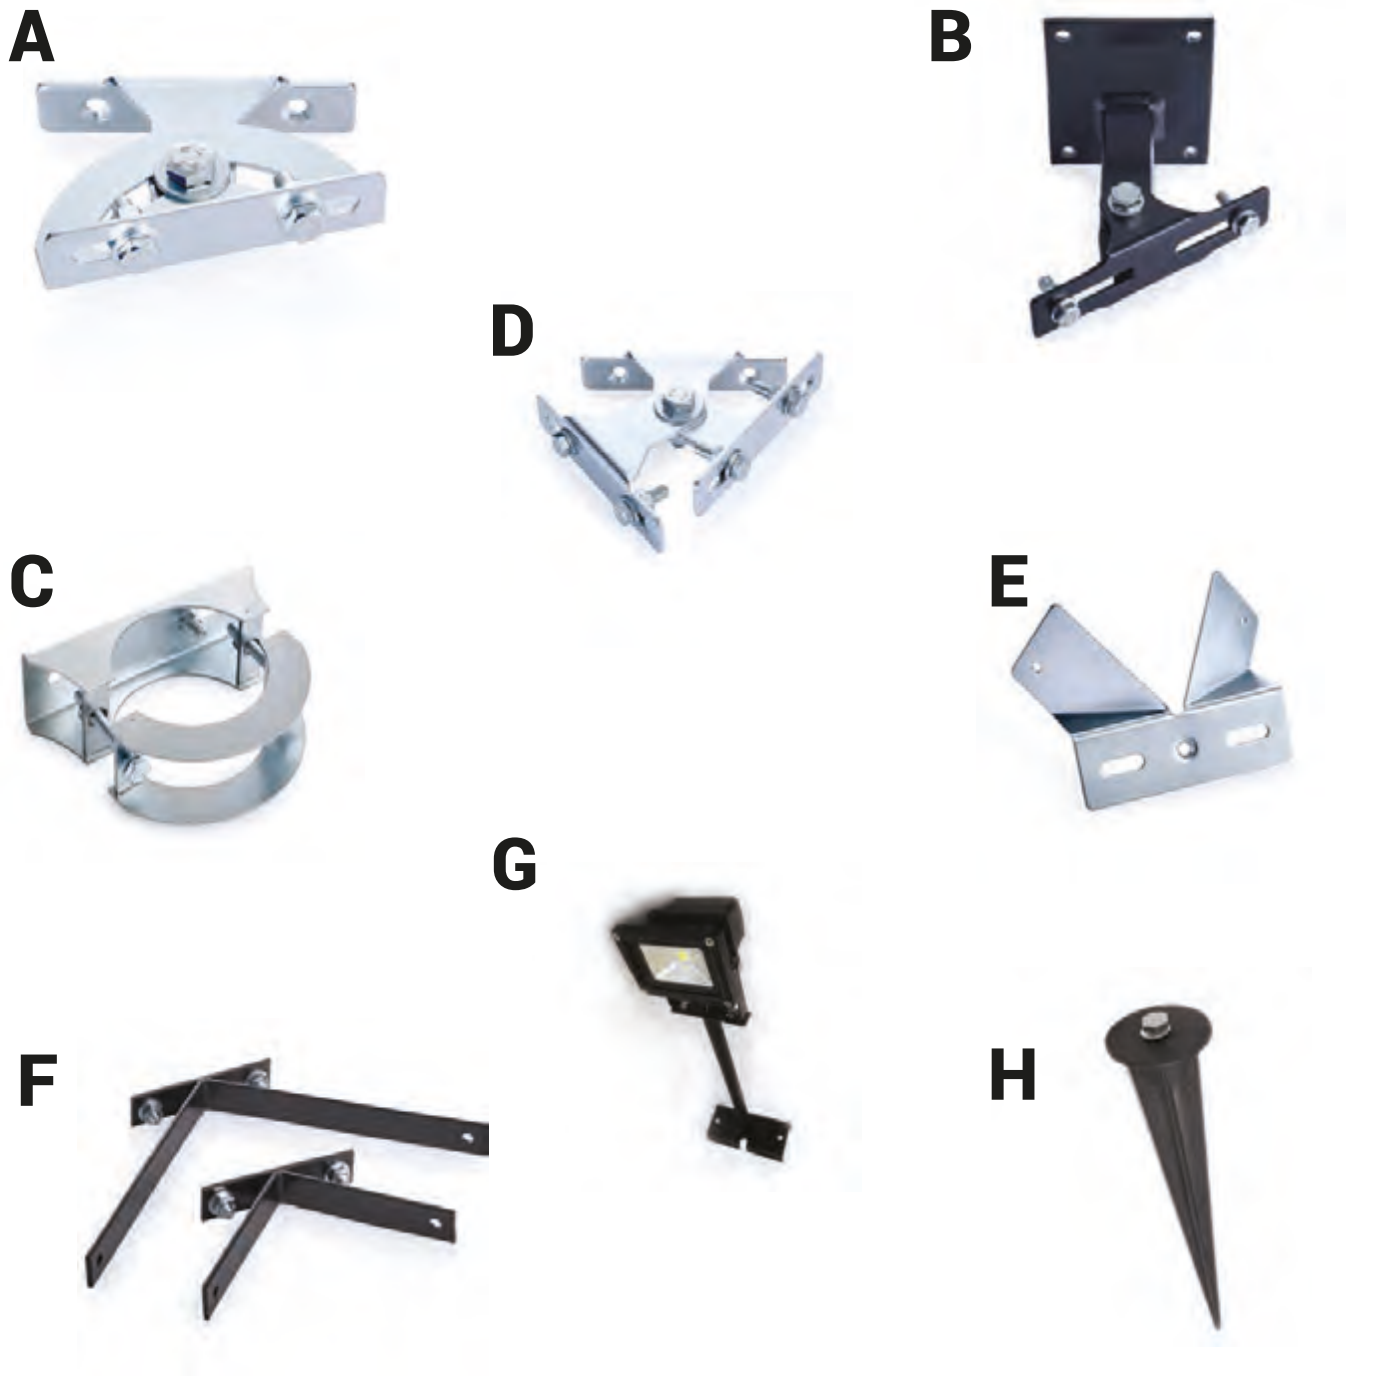

Part Number	CE-BRACKET1	CE-BRACKET2	CE-BRACKET3	CE-BRACKET4	CE-BRACKET5	CE-ADAPTBRACKET	CE-SIGNBRACKET	CE-GROUND SPIKE
Image	A	B	C	D	E	F	G	H
Suitable Floods	10W/20W	80W/100W/ 150W/200W	80W/100W/ 150W/200W	10W/20W	10W/20W	For corner use with CE-BRACKET2	10W/20W	10W/20W/30W
Type	Swivel	Heavy-Duty Angled	Post-Mounted	Twin	Corner	Heavy-Duty Corner	Sign Lighting	Ground Spike
Max Weight	1Kg	6Kg	11Kg	2Kg	2Kg	6Kg	1Kg	1.8Kg
Dimensions (mm)	95 x 80	180 x 160	210 x 65	95 x 20	100 x 35	255 x 130	325 x 140	170 x 45

# Outdoor

---





# Nano Shark

**NEW**

- Adjustable 2CCT
- IK10 impact rating
- Suitable for rear and side entry
- Up to 140 lm/w non flicker
- Die-cast aluminium (powder coated)
- 5 year warranty



120°



220-240V



50,000



No



3000K 4000K



Part Number	<b>SB1-NANO</b>
Power Rating	4.8W
Max Lumens	580
Dimensions (mm)	128 x 104 x 67

# Midi Shark

- Midi is Wattage / CCT Selectable
- IK10 impact rating
- Suitable for rear and side entry
- Up to 140 lm/w non flicker
- Die-cast aluminium (powder coated)
- 5 year warranty



120°



220-240V



50,000



No



3000K 4000K



Part Number	<b>SB1-MIDI</b>
Power Rating	7-12W
Max Lumens	950-1550
Dimensions (mm)	260 x 214 x 136.5

**IK 10**
**IP 65**

# Heaton Streetlight

- Optional built-in Photocell with override capability
- Asymmetric Type II-M Lens
- Installing diameter: 30-60mm
- Supplied with 60cm cable
- Please see page 36 for accessories
- 3 year warranty



45°-145°



220-240V



30,000



No



6500K

**4th WIRE  
Photocell bypass**



Part Number	HE1P-30C	HE1P-50C	HE1P-80C	HE1P-100C
Watt	30W	50W	80W	100W
Max Lumens	3500	5800	9200	11500
Dimensions (mm)	300 x 140 x 55	380 x 160 x 57	480 x 230 x 63	480 x 230 x 63

**CRI >70**

**IP 65**

# Astra I Solar Street Light With PIR

- Easy installation no wire required
- Assymetric Lens
- Up to 3 day Autonomous Time
- 12Ah Battery LifePO4
- Photocell and PIR
- Mono-crystalline Panel ABS Casing
- 3 year warranty



Solar



30,000

PIR Detection  
& Photocell

Cordless



6500K



Part Number	<b>AS1-1200C</b>
Watt	11W
Max Lumens	1200
Dimensions (mm)	450 x 210 x 80
PIR Detection	120° (5-8m)

IP 65

# Street Lighting Brackets and Adaptors



Part No	SLA-105	SLA-202	SLA-212
Description	Spigot Adaptor for Street Light 60-83mm	Galvanised Adjustable Right Angled Single Arm Bracket fits 76mm Column, fits 60mm Luminaire 100mm projection at 90deg	Galvanised Adjustable Right Angled Single Arm Bracket fits 60mm Column, fits 60mm Luminaire 100mm projection at 90deg
Compatible With	HE1P & AS1	HE1P & AS1	HE1P



Part No	SLA-222	SLA-512	SLA-601
Description	Galvanised Twin Arm Bracket fits 76mm Column, fits 42mm Luminaire 300mm projection	Galvanised Wall Bracket with 60mm Arm diameter	Galvanised Wall Bracket with 42mm Arm diameter 250mm Outreach and 15deg uplift
Compatible With	HE1P	HE1P & AS1	HE1P

# Wentworth Bollards

## Wentworth Retrofit E27

- Recommend use with LY1 Lamps
- Bolt fixings included



220-240V

Part No	WR1
Max Lamp Power	10W
Max Lumens	2750
Dimensions (mm)	750 x 165
Base Diameter (mm)	153
Lamp Fitting	E27



IP 44

## Wentworth Slim

- Light emitted Down
- Bolt fixings included



220-240V



30,000



No



4000K

Part No	WS1-1N
Watt	18W
Max Lumens	2180
Dimensions (mm)	750 x 195
Base Diameter (mm)	200
Consumed Power	21W



CRI >70

IP 65

IK 08

## Wentworth Wide

- PMMA Diffuser
- Bolt fixings included
- ENEC certified Driver



220-240V



30,000



No



4000K

Part No	WW1-1N
Watt	20W
Max Lumens	2000
Dimensions (mm)	750 x 200
Base Diameter (mm)	298
Consumed Power	20W



CRI >70

IP 65

IK 08

# Lamps

---



# Lyra III

- Equivalent to 60W incandescent
- Available with B22 & E27 fittings
- 1 year warranty
- Dimmable version recommended dimmer = Varilight VPRO



180°



220-240V



15,000

See  
TableSee  
Table

## Non-Dimmable

Part Number	LY3-2200W	LY3-2700W
Watt	8W	8W
Fitting	B22	E27
Colour Temperature	3000K	3000K
Max Lumens	810	810
Dimensions (mm)	106 x 60	106 x 60

## Dimmable

Part Number	LY3-2200WD	LY3-2700WD	LY3-2700CD
Watt	10W	10W	10W
Fitting	B22	E27	E27
Colour Temp	3000K	3000K	5000K
Max Lumens	1050	1050	1050
Dimensions (mm)	120 x 60	120 x 60	120 x 60

INDOOR  
USE ONLYNOT SUITABLE FOR  
ACCENT LIGHTING

CRI &gt;80



B22



E27

# Topaz R63 & R80

- 2 year warranty



120°



220-260V



25,000



No



3000K

Part Number	TR63-2700W	TR80-2700W
Watt	8W	12W
~Incandescent	48W	60W
Max Lumens	600	810
Dimensions (mm)	103 x 63	112 x 77

INDOOR  
USE ONLYNOT SUITABLE FOR  
ACCENT LIGHTING

CRI &gt;80




E27

# Lyra II

- Equivalent to 100W incandescent
- 2 year warranty



Part Number	LY2-2200W	LY2-2700W
Watt	16W	16W
Fitting	B22	E27
Max Lumens	1400	1400
Dimensions (mm)	135 x 68	137 x 68

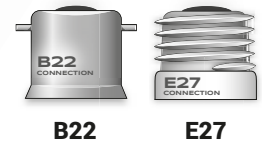


# Sirius IV

- Equivalent to 30W incandescent
- 2 year warranty



Part Number	SC4-2200W	SC4-2200C	SC4-1400W	SC4-1400C	SC4-2700W	SC4-2700C
Watt	5W	5W	5W	5W	5W	5W
Fitting	B22	B22	E14	E14	E27	E27
Colour Temp	3000K	5000K	3000K	5000K	3000K	5000K
Max Lumens	470	470	470	470	470	470
Dimensions (mm)	99 x 37	99 x 37	99 x 37	99 x 37	99 x 37	99 x 37

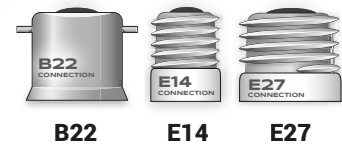




# Mira Golf

- Equivalent to up to 40W incandescent
- Available with B22, E14 & E27 fittings
- 1 year warranty

 **150°**
 **100-260V**
 **15,000**
 **No**
 **See Table**



Part Number	<b>MG4-2200W</b>	<b>MG3-2200C</b>	<b>MG4-1400W</b>	<b>MG4-2700W</b>	<b>MG3-2700C</b>
Watt	5W	4W	5W	5W	4W
Fitting	B22	B22	E14	E27	E27
Colour Temp	3000K	5000K	3000K	3000K	5000K
Max Lumens	470	350	470	470	350
Dimensions (mm)	79 x 45	71 x 45	81 x 45	81 x 45	73 x 45

 **INDOOR USE ONLY**
 **NOT SUITABLE FOR ACCENT LIGHTING**
 **CRI >80**

# Titan II

- Replaces a 50W halogen lamp
- 2 year warranty

### Non-Dimmable

Part Number	<b>TT2-10CW</b>	<b>TT2-10WW</b>
Watt	4.5W	4.5W
Colour Temp	6500K	3000K
Max Lumens	365	346
Dimensions (mm)	Ø50 x 55	Ø50 x 55

 **36°**
 **220-240V**
 **25,000**
 **No**
 **See Table**




### Dimmable

Part Number	<b>TT2D-10W</b>	<b>TT2D-10C</b>
Watt	5W	5W
Colour Temp	3000K	6000K
Max Lumens	346	365
Dimensions (mm)	Ø50 x 54	Ø50 x 54

 **38°**
 **220-240V**
 **25,000**
 **Yes**
 **See Table**

 **INDOOR USE ONLY**
 **CRI >80**



# Emergency

---



# Capri Emergency Slimline

- Suitable for maintained and non maintained applications
- 3 hour emergency maintained operation
- Hinged gear tray
- Loop in-loop out, fast fit push terminals
- Class II double insulated product
- Includes legend sticker
- 3 year warranty



50°



220-240V



50,000



No



6500K



CRI &gt;80

IP 65



	Light Unit	Recess Kit	Wedge Diffuser Legend	Self-Test Kit
Part Number	CPEM-MV2	CPEM-MV2RK	CPEM-MV2DF	CPEM-MST
Watt	3W			
Type	Maintained			
Max Lumens	150			
Emergency Time	3 hours			
Battery	Ni-CD 3.6V 1.5Ah			
Dimensions	351 x 111 x 63			

# Scorpio II Twin Spot

- White polycarbonate body
- Light weight
- Self test function available
- Charge Time 24 Hours
- 4 year warranty



220-240V

Part No	SCO2-NM3
Watt	2 x 1.5W
Type	Non-maintained
Max Lumens	500
Emergency Time	3 hours
Battery	LiFePO4 3.2V 3.3Ah
Dimensions (mm)	300 x 287.5 x 68.5



IP 65



# Artemis V2

- Supplied with up arrow legend
- Down, right & left legends = ART-LEGENDLR Available
- New Slim Design
- 3 hour duration
- Ni-Cd 3.6V battery cells
- Maintained operation
- 4 year warranty
- 1 year warranty for battery



IP 20



	Standard	Self Test	Down Legend	Left Legend	Right Legend
Part Number	<b>ART-M3U-V2</b>	<b>ART-M3U-V2ST</b>	<b>ART-M3D</b>	<b>ART-M3L</b>	<b>ART-M3R</b>
Watt	3.5W	3.5W			
Type	Maintained	Maintained			
Max Lumens	80	80			
Input Voltage	220-240V	220-240V			
Dimensions	330 x 186 x 30	330 x 186 x 30			

# Sela V2

- 3 hour duration
- Ni-Cd 3.6V battery cells
- Maintained operation
- Supplied with up legend
- 3 year warranty
- 1 year warranty for battery



CRI >80

IP 20



	Standard	Self Test	Suspension Kit	Recessed Kit	Down Legend	Left & Right Legend
Part Number	<b>SEL-SMM3V2</b>	<b>SEL-SMM3V2ST</b>	<b>SEL-SMM3V2SUS</b>	<b>SEL-SMM3V2RC</b>	<b>SEL-SMM3V2LEGD</b>	<b>SEL-SMM3V2LEGLR</b>
Watt	2.2W	2.2W				
Input Voltage	220-240V	220-240V				
Dimensions	313 x 212 x 42	313 x 212 x 42				

# Odin 2 Open Area Downlight

- Compact slim design
- 3 hours duration
- 3.6V 1800mAh Ni-Cd
- Non maintained
- 3 year warranty
- 1 year warranty for battery
- White or Silver Interchangeable Bezel



Part Number	<b>OD2-3WOC</b>
Watt	3W
Lumens	178
Input Voltage	220V-240V
Cut Out (mm)	Ø35

IP 20



## Zeus

- Open area/corridor lens interchangeable
- Surface Mount
- Self test function available
- 3 year warranty



	White	Black
Part Number	<b>ZS1-1W</b>	<b>ZS1-1B</b>
Function	Open Area	Open Area
Max Lumens Open	270	270
Max Lumens Corridor	230	230
Watts	1.6W	1.6W
Emergency Time	3 hours	3 hours
Battery	LiFePO4 3.2v 3.3Ah	LiFePO4 3.2v 3.3Ah
Dimensions (mm)	155 x 155 x 46	155 x 155 x 46

CRI &gt;80

IP 65



# Panel Emergency Pack

- Suitable for use with Moonstone 5 and Selene series
- 5 year warranty (excluding battery)
- Suitable for use with up to 45W Panels



Part Number	<b>MS5-EM45W</b>
Watt	10W
Charge Time	24 hours
Emergency Time	3 hours
Input Voltage	230VAC
Battery	Ni-CD 12V 3.0Ah
Dimensions (mm)	330 x 102 x 43

IP 20



# High Bay Emergency Pack

- Suitable for use Gawsworth 5 Series
- Fits Directly on to High Bay
- 3 year warranty



Part Number	<b>GA5-EM</b>
Constant Power	5W
Charge Time	24 hours
Emergency Time	3 hours
Input Voltage	220-240V
Battery	LiFePO4 3.2V 6000mAh
Charge Current	400mA
Charge Voltage	3.7VDC
Output Voltage	10-90VDC
LED Power	3.5W (Max.)

IP 20



# Accessories

---



# Osprey 1 3-in-1 PIR

- Wall, Ceiling or Corner Mounted
- 3 Year Warranty
- 12M Detection

	Black	White
Part Number	<b>OS1-PWMB</b>	<b>OS1-PWMW</b>
Detection Distance	12M	12M
Detection Range	360	360
Input Volatge	220-240V	220-240V
Total Wattage	0.5W	0.5W
Rated Load	Max 1200W LED, 600W CFL	Max 1200W LED, 600W CFL
Installation Height	1.8-2.5M	1.8-2.5M
Warranty	3 Years	3 Years
Dimensions	63x92x76mm	63x92x76mm



IP 65

# Osprey 1 Long Range PIR

- Wall or ceiling Mounted
- 3 Year Warranty
- 20M Detection

	Black	White
Part Number	<b>OS1-PWMLRB</b>	<b>OS1-PWMLRW</b>
Detection Distance	20M	20M
Detection Range	360	360
Input Volatge	220-240V	220-240V
Total Wattage	0.5W	0.5W
Rated Load	Max 2000W LED, 1000W CFL	Max 2000W LED, 1000W CFL
Installation Height	2.2-6M	2.2-6M
Warranty	3 Years	3 Years
Dimensions	86.5x172.5x85.6	86.5x172.5x85.6



IP 65

# Osprey 2 Photocell

- 3 Year Warranty
- IP65

	Black	White
Part Number	<b>OS2-PCB</b>	<b>OS2-PCW</b>
Input Volatge	220-240V	220-240V
Warranty	3 Years	3 Years
Dimensions	86.5x172.5x85.6	86.5x172.5x85.6



IP 65



# Osprey 1 Surface PIR

- 3 Year Warranty
- 8M Detection

Part Number	<b>OS1-PSF</b>
Detection Distance	8M
Detection Range	360
Input Volatge	110-204V
Total Wattage	0.5W
Rated Load	Max 400W LED, 200W CFL at 220-240V
Installation Height	76x20.2mm
Warranty	3 Years
Dimensions	50x61.8mm



IP 20

# Osprey 1 Surface/ Recessed Long Range PIR

- Wall or ceiling Mounted
- 3 Year Warranty
- 20M Detection

Part Number	<b>OS1-PRCSFLR</b>
Detection Distance	20M
Detection Range	360
Input Volatge	220-240V
Total Wattage	0.5W
Rated Load	Max 2000W LED, 1000W CFL
Installation Height	2.2-6M
Warranty	3 Years
Dimensions	111.5x65.2mm



IP 44

# Osprey 1 Mini Recessed PIR

Part Number	<b>OS1-PRC</b>
Detection Distance	6M
Detection Range	360
Input Volatge	220-240V
Total Wattage	0.5W
Rated Load	Max 800W LED, 400W CFL
Installation Height	2.2-4M
Warranty	3 Years
Dimensions	50x61.8mm
Cut out (mm)	40

- 3 Year Warranty
- 6M Detection



IP 20



**Project Support Program**

**Designed to support our end users, the Diamond LED Lighting PSP provides a range of benefits to help you secure new commercial projects in a competitive market.**

**Program Benefits:**

- Site Visits
- Extended Warranty
- Upto 12 months Onsite Warranty
- Lighting Design Services
- Technical Advice
- Preferred Wholesaler Pricing Support
- ROI Calculations
- Quick Response
- Direct to Site Delivery

Scan to learn more:



# FREE Stockists Marketing Support\*



Diamond LED Lighting are **committed**  
to **supporting** our **trade customers**

We can supply you with complimentary Point of Sale (POS)  
and marketing tools to assist you in selling our products.



**Next Day  
Delivery**

For orders placed  
before 4pm



**Carriage  
Paid**

On any order  
over £50



**Dedicated  
Sales Team**

01260 292 640  
sales@diamondledlighting.co.uk



**Technical  
Support**

For advice and  
problem solving



**Customer  
Services**

For after sales care



**Calculation  
Service**

Contact us for  
more information



**Open For  
Business**

8:15am - 5:00pm  
Monday - Friday

To request marketing material or to discuss the  
various options that are available, please contact:

t: 01260 292 640 e: sales@diamondledlighting.co.uk

\*Free with a carriage paid order.

[www.diamondledlighting.co.uk](http://www.diamondledlighting.co.uk)



**diamond**  
led lighting®  
*lighting the future*

**Diamond LED Lighting Limited**

Unit 43/44, Brookhouse Road  
Parkhouse Industrial Estate West  
Newcastle-under-Lyme, Staffordshire  
ST5 7RU

Tel: 01260 292 640

Fax: 01260 279 116

Email: [sales@diamondledlighting.co.uk](mailto:sales@diamondledlighting.co.uk)  
[www.diamondledlighting.co.uk](http://www.diamondledlighting.co.uk)

