

NEW



# 2019 Range

Product Catalogue - 9 v2

[www.diamondledlighting.co.uk](http://www.diamondledlighting.co.uk)



## Introducing the Select Range from Diamond LED Lighting

- Selectable temperature modes
- Greater options for your customers
- Save shelf space



**3 CCT  
LED**

**3000K**

**4000K**

**6000K**

Look out for the Select logo



# Contents

**4**

**Amenity**

**12**

**Office**

**18**

**Downlights**

**20**

**Industrial**

**24**

**Floodlights**

**34**

**Outdoor**

**36**

**Lamps**

**42**

**Emergency**

### Who We Are

Since 2008 Diamond LED Lighting Ltd has provided energy efficient LED Lighting to the electrical wholesaler market. We commit significant resources to the development and quality testing of all our products along with an in depth stocking policy which ensures a high level of customer service.

Year on year Diamond enjoys consistently strong growth. We hold extensive stock enabling 24 hour delivery to our trade customers. We offer extensive reseller support packages including personalised marketing materials and highly visible Point Of Sale displays. Our customers can rely on us for a personal service with unrivalled product knowledge and technical support. This catalogue features our latest new products along with our best selling ranges designed for a wide range of lighting applications.

### CE Declaration

All Diamond LED Lighting products adhere to and comply with the safety standards and regulations set out by the European Union and UK Statutory Instruments.

## Symbols



**Beam angle**



**Input**



**Dimmable**



**Life hours**



**Colour  
temperature**

Warm = 2600K - 3000K  
Natural = 4000K - 4500K  
Cool = 5000K - 6500K

Diamond LED Lighting Ltd reserves the right to update product specifications without notice. Product supplied may differ slightly in appearance from images shown in this brochure. The company shall not be liable for any errors or omissions. Full terms & conditions available upon request. Please refer to our website for the latest product information. For warranty conditions on specific products, please contact Sales with the part number.

T: 01260 292 640 | [sales@diamondledlighting.co.uk](mailto:sales@diamondledlighting.co.uk) | [www.diamondledlighting.co.uk](http://www.diamondledlighting.co.uk)



# Amenity



## Phoenix Mini Dual Colour

- Selectable 2 colour temperatures
- Besa box mounting
- 3 hour emergency version
- Replaces a 16W 2D
- 2 year warranty

  
120°

  
180-265V

  
25,000

  
No

  
3000K  
5000K

|                           |             |
|---------------------------|-------------|
| Part Number               | PHM-10D     |
| Watt                      | 7.5W        |
| Lumens                    | 675 & 730   |
| Dimensions (mm)           | Ø 270 x 100 |
| Microwave                 | PHM-10DMW   |
| 3Hr Emergency             | PHM-10DEM   |
| 3Hr Emergency & Microwave | PHM-10DEMMW |
| Photocell                 | PHM-10DPC   |



CRI >80  
IP 65



## Phoenix Slim Tri Colour

- Selectable 3 colour temperatures
- 3 hour emergency version
- Replaces a 28W 2D
- 2 year warranty

  
180°

  
220-240V

  
25,000

  
No

  
3000K 4000K  
5000K

|                           |             |
|---------------------------|-------------|
| Part Number               | PHS-10D     |
| Watt                      | 15W         |
| Lumens                    | 1000        |
| Dimensions (mm)           | Ø 320 x 80  |
| Microwave                 | PHS-10DMW   |
| 3Hr Emergency             | PHS-10DEM   |
| 3Hr Emergency & Microwave | PHS-10DEMMW |



CRI >80  
IP 65



NEW





# Phoenix I Dual Colour

- Selectable 2 colour temperatures
- Besa box mounting
- 3 hour emergency version
- Replaces a 28W 2D
- Step dimming available
- 2 year warranty

  
120°

  
90-265V

  
25,000

  
No

  
3000K  
5000K

|                               |                   |                     |
|-------------------------------|-------------------|---------------------|
| Part Number                   | PH1-1000D (White) | PH1-1000DC (Chrome) |
| Watt                          | 15W               | 15W                 |
| Lumens                        | 1086 & 1154       | 1086 & 1154         |
| Dimensions (mm)               | Ø 320 x 100       | Ø 320 x 100         |
| Microwave                     | PH1-1000DMW       | PH1-1000DCMW        |
| 3Hr Emergency                 | PH1-1000DEM       | PH1-1000DCEM        |
| 3Hr Emergency & Microwave     | PH1-1000DEMMW     | PH1-1000DCEMMW      |
| Photocell                     | PH1-1000DPC       | PH1-1000DCPC        |
| Corridor Function             | PH1-1000DCF       | PH1-1000DCCF        |
| Corridor Function & Emergency | PH1-1000DCFEM     | PH1-1000DCCFEM      |



CRI >80

IP 65



# Athena Bulkhead

- Suitable for external use
- 3 year warranty

  
120°

  
200-240V

  
30,000

  
No

  
4200K

|                 |                 |
|-----------------|-----------------|
| Standard        | AT1-NB          |
| PIR Version     | AT1-NB-PIR      |
| Watt            | 7W              |
| Lumens          | 500             |
| Dimensions (mm) | 267 x 113 x 108 |



CRI >80

IP 44



# Phoenix II Dual Colour

- Selectable 2 colour temperatures
- Besa box mounting
- 3 hour emergency version
- Replaces a 28W 2D
- Step dimming available
- 2 year warranty

  
120°


  
90-265V

  
25,000

  
No

  
3000K  
5000K

|                               |               |
|-------------------------------|---------------|
| Part Number                   | PH2-1000D     |
| Watt                          | 15W           |
| Lumens                        | 1086 & 1154   |
| Dimensions (mm)               | Ø 280 X 90    |
| Microwave                     | PH2-1000DMW   |
| 3Hr Emergency                 | PH2-1000DEM   |
| 3Hr Emergency & Microwave     | PH2-1000DEMMW |
| Photocell                     | PH2-1000DPC   |
| Corridor Function             | PH2-1000DCF   |
| Corridor Function & Emergency | PH2-1000DCFEM |



CRI >80

IP 65



# Nobel Mini Bulkhead

- Suitable for external use
- 3 year warranty

  
120°

  
180-240V

  
30,000

  
No

  
4200K

|                        | Full       | Eyelid     |
|------------------------|------------|------------|
| White Casing           | NO1-NW     | NO1-NEW    |
| Black Casing           | NO1-NB     | NO1-NEB    |
| Watt                   | 6W         | 6W         |
| Lumens                 | 600        | 500        |
| Dimensions (mm)        | Ø 215 x 77 | Ø 203 x 79 |
| Photocell White Casing | NO1-NWPC   | NO1-NEWPC  |
| Photocell Black Casing | NO1-NBPC   | NO1-NEBPC  |



CRI >80

IP 65

# Empire Bulkhead

- Suitable for external use
- IK08 impact rating
- 3 year warranty



120°



200-240V



30,000



No



4200K

|                        | Full       | Eyelid     |
|------------------------|------------|------------|
| White Casing           | EM1-NW     | EM1-NEW    |
| Black Casing           | EM1-NB     | EM1-NEB    |
| Watt                   | 12W        | 12W        |
| Lumens                 | 1100       | 900        |
| Dimensions (mm)        | Ø 300 x 90 | Ø 300 x 93 |
| Photocell White Casing | EM1-NWPC   | EM1-NEWPC  |
| Photocell Black Casing | EM1-NBPC   | EM1-NEBPC  |



CRI >80  
IP 66

# Lambeth Bulkhead

- 3 year warranty



120°



180-240V



30,000



No



4200K

|                 |                |                |
|-----------------|----------------|----------------|
| Part Number     | LA1-NW         | LA1-NB         |
| Watt            | 5W             | 5W             |
| Colour          | Natural        | Natural        |
| Casing          | White          | Black          |
| Lumens          | 450            | 450            |
| Dimensions (mm) | 169 x 115 x 76 | 169 x 115 x 76 |



CRI >80  
IP 65

# Axiom Bulkhead with Opal Diffuser

- 3 year warranty



120°



180-240V



30,000



No



4200K

|                 |                   |
|-----------------|-------------------|
| Part Number     | AX1-NB            |
| Watt            | 6W                |
| Colour          | Natural           |
| Lumens          | 550               |
| Dimensions (mm) | Ø 240 x 116 x 130 |



CRI >80  
IP 65

# Panda

- 5 year warranty



120°



90-264V



25,000



No



5000K

|                           |                |
|---------------------------|----------------|
| Part Number               | PANRDLED       |
| Watt                      | 18W            |
| Lumens                    | 1000           |
| Dimensions (mm)           | Ø 300 X 88     |
| Microwave                 | PANRDLED/MW    |
| 3Hr Emergency             | PANRDLED/EM    |
| 3Hr Emergency & Microwave | PANRDLED/MW/EM |



CRI >80  
IP 65



# Kensington Mini

• 3 year warranty

**120°**

**220-240V**

**30,000**

**No**

**4000K**

|                 |                |
|-----------------|----------------|
| Part Number     | KE1-CMINI      |
| Watt            | 7W             |
| Colour          | Natural        |
| Lumens          | 450            |
| Dimensions (mm) | 205 x 155 x 73 |



CRI >80

IP 65

# Kensington

• 3 year warranty

**120°**

**100-240V**

**30,000**

**No**

**4200K**

|                 |                 |
|-----------------|-----------------|
| Part Number     | KE1-NB          |
| Watt            | 30W             |
| Colour          | Natural         |
| Lumens          | 2200            |
| Dimensions (mm) | 310 x 265 x 122 |
| Photocell       | KE1-NBPC        |



CRI >80

IP 65

# Apollo Solar

- Works up to 8 hrs in mode 1
- Replaceable battery
- Full charge time as low as 6 hrs in bright sunlight
- 3 Modes
  1. Low Light (10lm)
  2. PIR - Medium Light (100lm)
  3. PIR - Full Light (450lm)
- Battery 1 x 2000mAh 7.4V Li-Ion
- 2 year warranty

**Solar**

**20,000**

**PIR**

**Cordless**

**4000K**

|                 |                |
|-----------------|----------------|
| Part Number     | AP1-PIR        |
| Watt            | 8.5W           |
| Lumens          | 450            |
| Dimensions (mm) | 210 x 90 x 105 |
| PIR Detection   | 100° (5-8m)    |



IP 44

# Helios Solar

- Works up to 8 hrs in mode 1
- Full charge time as low as 6 hrs in bright sunlight
- 3 Modes
  1. Low Light (12lm)
  2. PIR - Medium Light (50lm)
  3. PIR - Full Light (200lm)
- Battery 1 x 2000mAh 3.7V Li-Ion
- 2 year warranty

**Solar**

**20,000**

**PIR**

**Cordless**

**4000K**

|                 |                 |
|-----------------|-----------------|
| Part Number     | HE1-PIR         |
| Watt            | 5W              |
| Lumens          | 200             |
| Dimensions (mm) | 160 x 207 x 287 |
| PIR Detection   | 120° (5-8m)     |



IP 44

# Office



## Nova Slim

- Suspension Kit part number **NV-SUSKIT**
- 2 year warranty


  
120°

  
220-240V

  
30,000

  
No

  
4000K

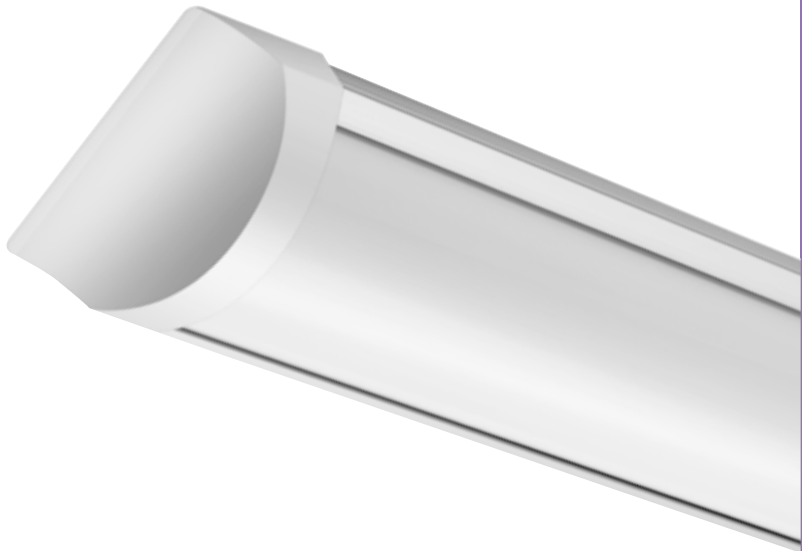

| Part Number     | NS1-4N               | NS1-5N               | NS1-6N               |
|-----------------|----------------------|----------------------|----------------------|
| Watt            | 45W                  | 55W                  | 65W                  |
| Lumens          | 4950                 | 6050                 | 7150                 |
| Dimensions (mm) | 1200 x 75 x 30 (4ft) | 1500 x 75 x 30 (5ft) | 1800 x 75 x 30 (6ft) |

CRI >80

IP 20

## Cyrus

- Surface or suspended fitting
- 5 year warranty

  
120°

  
220-240V

  
30,000

  
No

  
5000K



| Part Number     | CYR45LED/850    | CYR55LED/850    | CYR66LED/850    |
|-----------------|-----------------|-----------------|-----------------|
| Tube Size       | 4ft             | 5ft             | 6ft             |
| Watt            | 45W             | 55W             | 66W             |
| Lumens          | 3850            | 4665            | 5880            |
| Dimensions (mm) | 1237 x 213 x 87 | 1537 x 213 x 87 | 1801 x 213 x 87 |

CRI >80

IP 20





CRI >80  
IP 44



# Nova II Slim Tri Colour

- Selectable 3 colour temperatures
- Supplied with fixing kit
- Clip fixing
- Suspension kit part no. **NV-SUSKIT**
- 3 year warranty

  
120°

  
30,000

  
No

  
3000K  
4000K 6000K

|                 | 4ft                  | 5ft                  | 6ft                  |
|-----------------|----------------------|----------------------|----------------------|
| Part Number     | NS2-4T               | NS2-5T               | NS2-6T               |
| Watt            | 40W                  | 60W                  | 72W                  |
| Colour          | 3 CCT                | 3 CCT                | 3 CCT                |
| Lumens          | 4000                 | 6000                 | 7200                 |
| Input           | 100-265V             | 180-265V             | 180-265V             |
| Dimensions (mm) | 1200 x 72 x 38 (4ft) | 1500 x 72 x 38 (5ft) | 1800 x 72 x 38 (6ft) |



# Trinity Tri Colour

- Selectable 3 colour temperatures
- Direct replacement for fluorescent battens
- Matt white finish
- Dimmable options available
- 5 year warranty

  
145°

  
220-240V

  
40,000

  
Available

  
3000K  
4000K 6000K

|                       | 4ft Single     | 4ft Twin       | 5ft Single     | 5ft Twin       | 6ft Single     | 6ft Twin       |
|-----------------------|----------------|----------------|----------------|----------------|----------------|----------------|
| Part Number           | STR1-4S        | STR1-4T        | STR1-5S        | STR1-5T        | STR1-6S        | STR1-6T        |
| Watt                  | 30W            | 45W            | 35W            | 55W            | 45W            | 65W            |
| Colour                | 3 CCT          | 3 CCT          | 3 CCT          | 3 CCT          | 3 CCT          | 3 CCT          |
| Lumens                | 3300           | 4950           | 3850           | 6050           | 4950           | 7150           |
| Dimensions (mm)       | 1227 x 62 x 72 | 1227 x 62 x 72 | 1527 x 62 x 72 | 1527 x 62 x 72 | 1791 x 62 x 72 | 1791 x 62 x 72 |
| Microwave             | STR1-4SMW      | STR1-4TMW      | STR1-5SMW      | STR1-5TMW      | STR1-6SMW      | STR1-6TMW      |
| Emergency             | STR1-4SEM      | STR1-4TEM      | STR1-5SEM      | STR1-5TEM      | STR1-6SEM      | STR1-6TEM      |
| Emergency & Microwave | STR1-4SEMMW    | STR1-4TEMMW    | STR1-5SEMMW    | STR1-5TEMMW    | STR1-6SEMMW    | STR1-6TEMMW    |



# Excel

- Opal polycarbonate diffuser
- Microwave available
- Emergency version - add suffix/EM
- 5 year warranty

**140°**

**220-265V**

**50,000**

**Available**

**4000K**



|             | 4ft Single          | 4ft Twin            | 5ft Single          | 5ft Twin            | 6ft Single          | 6ft Twin            |
|-------------|---------------------|---------------------|---------------------|---------------------|---------------------|---------------------|
| Part Number | <b>BR30/LED/840</b> | <b>BR55/LED/840</b> | <b>BR40/LED/840</b> | <b>BR65/LED/840</b> | <b>BR50/LED/840</b> | <b>BR75/LED/840</b> |
| Watt        | 30W                 | 55W                 | 40W                 | 65W                 | 50W                 | 75W                 |
| Lumens      | 3370                | 5920                | 4600                | 7450                | 5335                | 8475                |

**CRI >80**

**IP 20**

Emergency

# Saturn II

- Glass tube construction with shatterproof plastic sleeve
- Batten fittings available
- 3 year warranty

**178°**

**180-265V**

**35,000**

**No**

**4000K**



|             | 2ft              | 4ft               | 5ft               | 6ft               |
|-------------|------------------|-------------------|-------------------|-------------------|
| Part Number | <b>SA2-600NF</b> | <b>SA2-1200NF</b> | <b>SA2-1500NF</b> | <b>SA2-1800NF</b> |
| Watt        | 9W               | 18W               | 24W               | 32W               |
| Lumens      | 945              | 1800              | 2500              | 3200              |

**CRI >80**

# Moonstone Panels

- Panel available to meet UGR19 lighting schemes. Please contact Sales
- Suspension kit part number **MS5-SUS**
- RGB panels also available
- 3000K & 5750K available
- Daylight harvesting and microwave sensors available

**120°**

**220-240V**

**30,000**

**Available**

**4000K**



|                   |                   |                  |                  |                  |
|-------------------|-------------------|------------------|------------------|------------------|
| Panel Size (mm)   | 600 x 600         | 600 x 600        | 1200 x 300       | 1200 x 600       |
| Part Number       | <b>MS5-66NFF</b>  | <b>MS5-66N5</b>  | <b>MS5-123N</b>  | <b>MS5-126N</b>  |
| Watt              | 40W               | 40W              | 40W              | 60W              |
| Lumens            | 3400              | 3400             | 3400             | 7200             |
| Dimensions (mm)   | 595 x 595 x 7.5   | 595 x 595 x 7.5  | 1195 x 295 x 7.5 | 1195 x 595 x 7.5 |
| Warranty          | 2 Years           | 5 Years          | 2 Years          | 5 Years          |
| Dimmable          | <b>MS5-66NFFD</b> | <b>MS5-66N5D</b> | <b>MS5-123ND</b> | -                |
| 3Hr Emergency Kit | <b>MS5-EM45W</b>  | <b>MS5-EM45W</b> | <b>MS5-EM45W</b> | -                |
| Surface Mount Kit | <b>MS5-CWM</b>    | <b>MS5-CWM</b>   | -                | -                |

**CRI >80**

**IP 20**

Emergency

# Elise TP(a) Panels

- Back lit design
- 3 hour emergency pack = **MS5-EM45W**
- 5 year warranty

**120°**

**100-250V**

**30,000**

**No**

**5000K**



|                 |                      |                      |
|-----------------|----------------------|----------------------|
| Panel Size (mm) | 600 x 600            | 1200 x 600           |
| Part Number     | <b>ELILED/V2/36W</b> | <b>ELILED/V2/70W</b> |
| Type            | TP(a)                | TP(a)                |
| Watt            | 36W                  | 70W                  |
| Lumens          | 3450                 | 6400                 |
| Dimensions (mm) | 595 x 595 x 55       | 595 x 1195 x 55      |

**CRI >80**

**IP 20**

# Downlights



## Vulcan Tri Colour Dimmable Fire-Rated Downlight

- Selectable 3 colour temperatures
- Fully fire rated for each 30, 60 and 90min
- Chrome, brushed and white bezels sold separately
- 3 year warranty

  
40°

  
220-240V

  
30,000

  
Yes

  
3000K  
4000K 6000K

|                 |           |                               |       |
|-----------------|-----------|-------------------------------|-------|
| Part Number     | VU1-8T    | Bezels Sold in Multiples of 5 |       |
| Watt            | 8W        | Chrome Bezel                  | VU-CH |
| Lumens          | 600-680   | Brushed Chrome Bezel          | VU-BC |
| Dimensions (mm) | ø 82 x 85 | White Bezel                   | VU-WH |
| Cut Out (mm)    | ø 70      |                               |       |



Bezels sold separately

CRI >80

IP 65



## Eclipse Tri Colour

- Selectable 3 colour temperatures
- Suitable to replace PL and 2D lights
- Emergency option available
- Surface mount kit available separately
- 2 year warranty

  
120°

  
175-240V

  
25,000

  
No

  
3000K  
4000K 6000K

|                               |            |            |            |
|-------------------------------|------------|------------|------------|
| Recessed Part Number          | EC1-12RD   | EC1-18RD   | EC1-20RD   |
| Cut Out (mm)                  | ø155       | ø205       | ø225       |
| Surface Mount Part Number     | EC1-12RDSM | EC1-18RDSM | EC1-20RDSM |
| Surface Kit For Recessed Part | EC-12RMK   | EC-18RMK   | EC-20RMK   |
| Watt                          | 12W        | 18W        | 20W        |
| Lumens                        | 960        | 1440       | 1600       |
| Dimensions (mm)               | ø170 x 34  | ø220 x 34  | ø240 x 34  |



Surface mount available

CRI >80


IP 20

 Emergency

Surface Mount part dimensions may differ to above



# Industrial

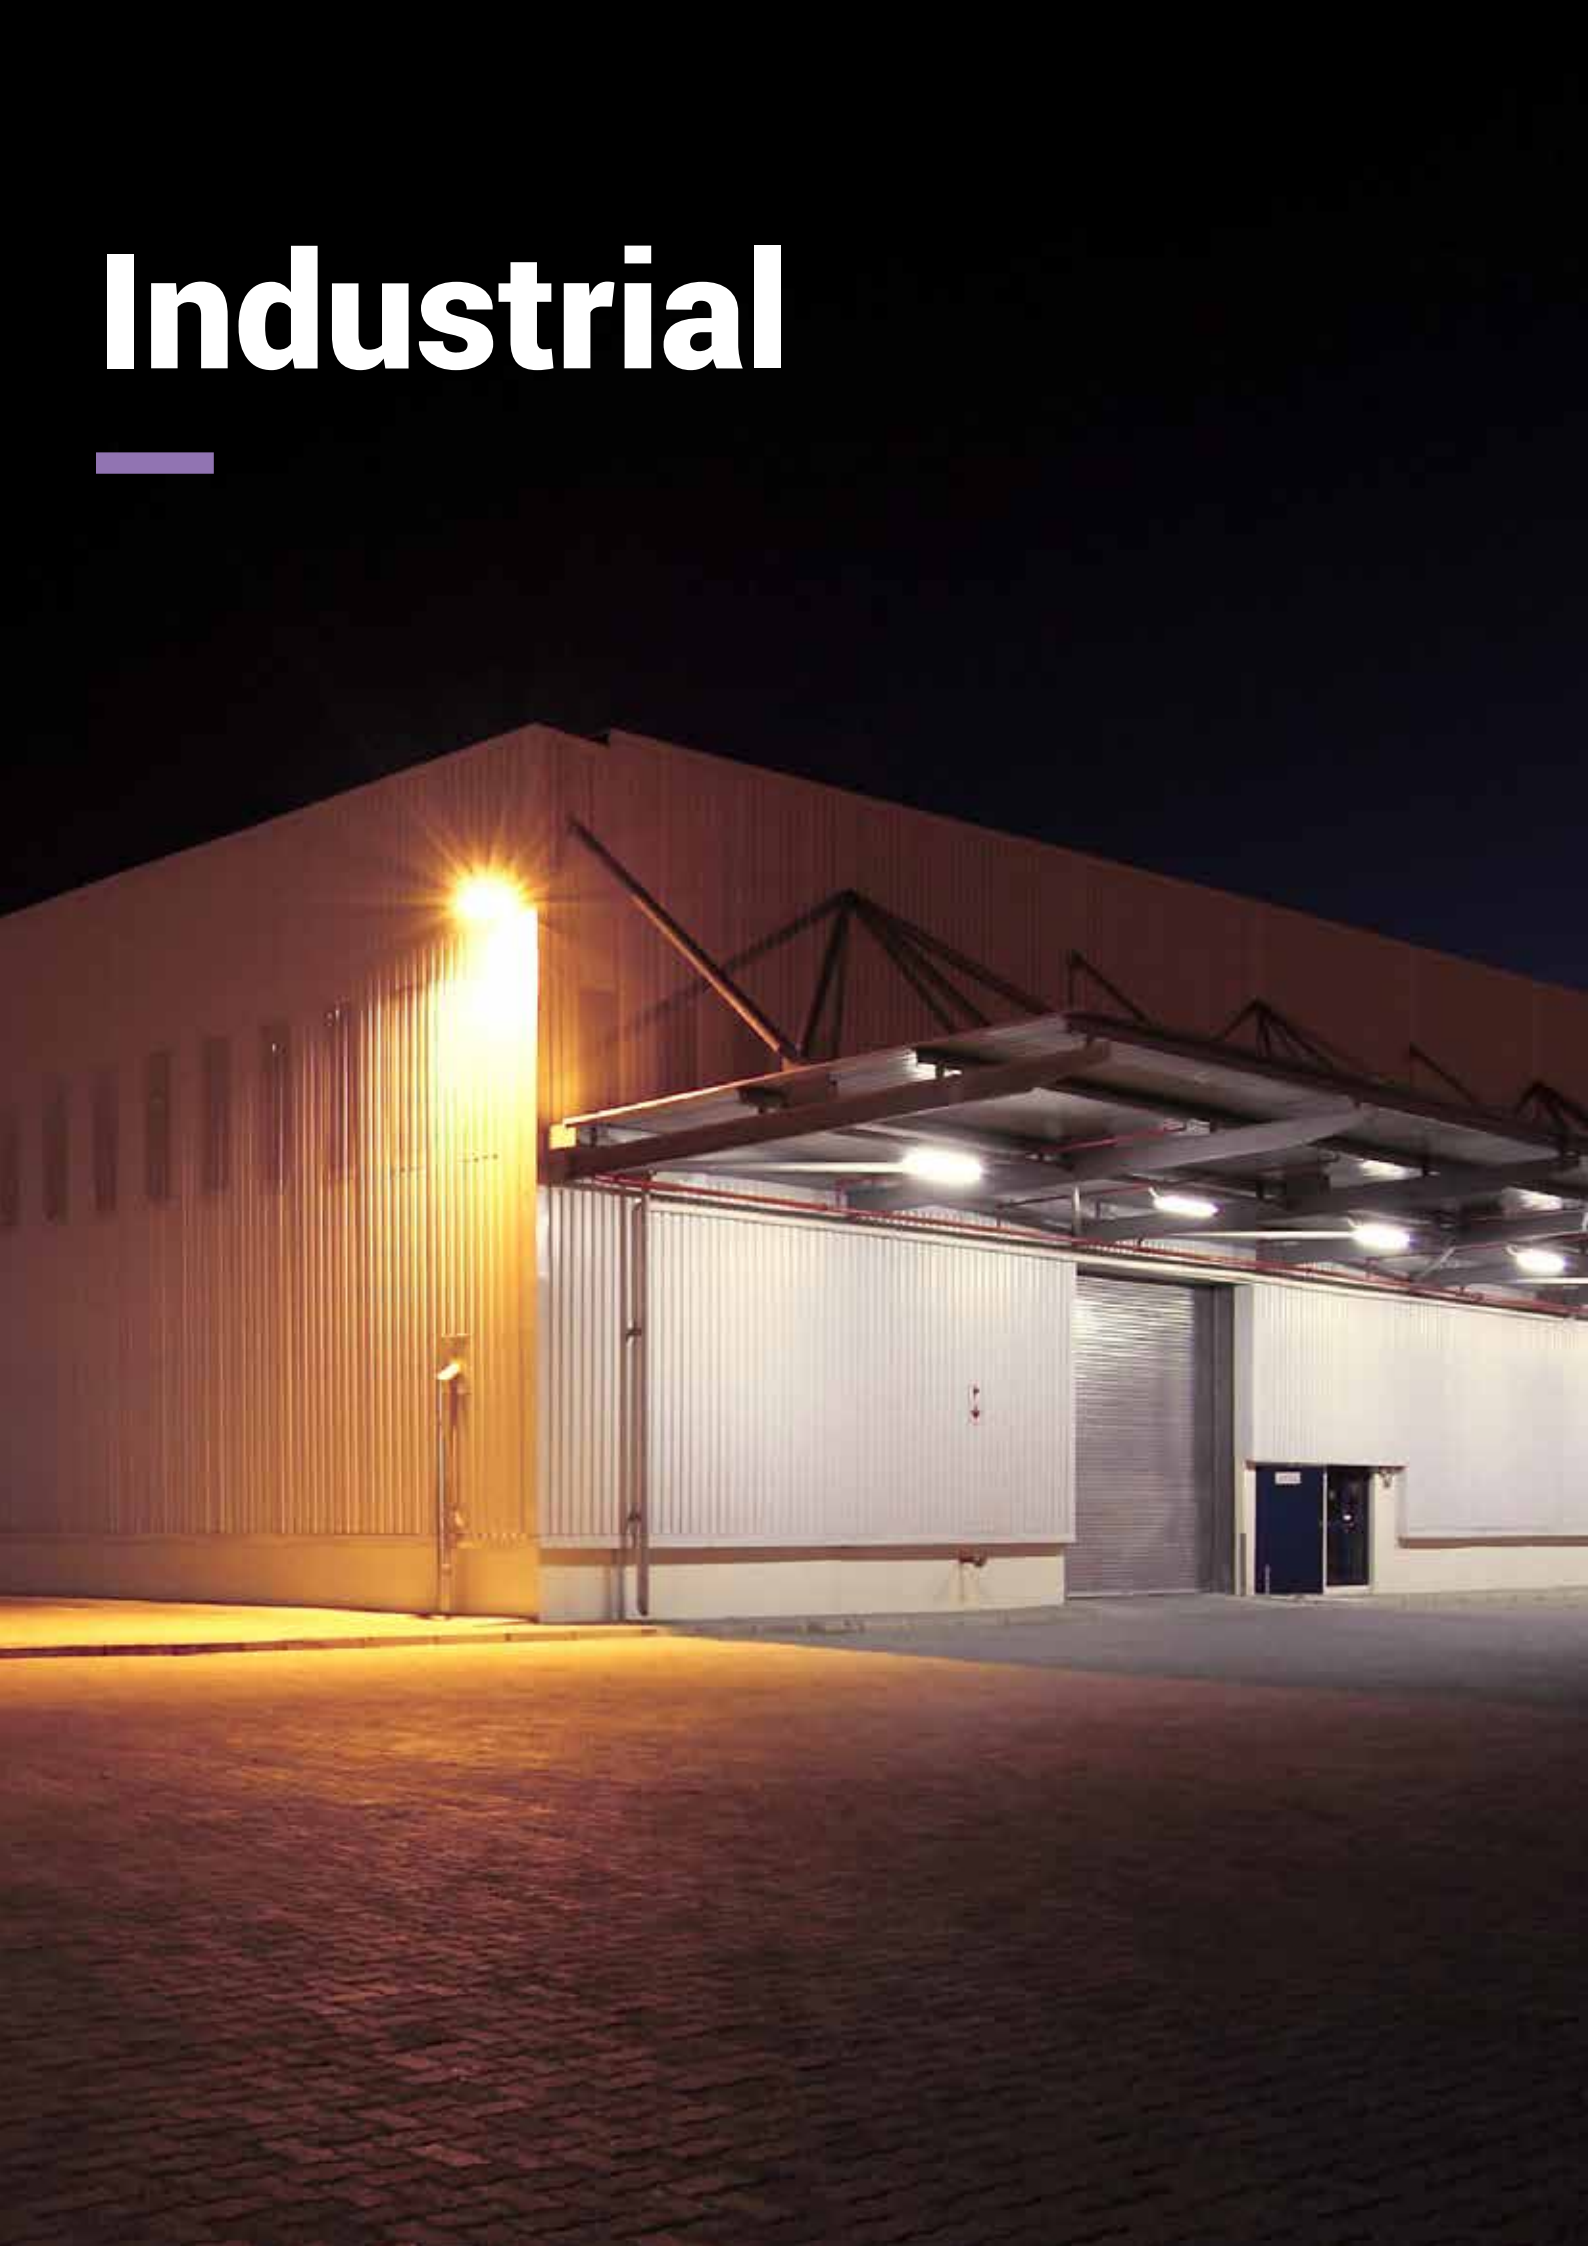

## Chatsworth II

- Polycarbonate construction
- Plastic clips
- Suitable for indoor or outdoor use
- Complete with fixing accessories
- Available with corridor function external sensor
- 3 year warranty

**120°**

**220-240V**

**30,000**

**Available**

**5000K**

**CRI >80**

**IP 65**

Emergency

|                           | 4ft Single     | 4ft Twin        | 5ft Single     | 5ft Twin        | 6ft Single     | 6ft Twin        |
|---------------------------|----------------|-----------------|----------------|-----------------|----------------|-----------------|
| Part Number               | CH2-4SN        | CH2-4TN         | CH2-5SN        | CH2-5TN         | CH2-6SN        | CH2-6TN         |
| Watt                      | 20W            | 40W             | 30W            | 55W             | 40W            | 80W             |
| Lumens                    | 2000           | 4000            | 3000           | 5500            | 4000           | 8000            |
| Dimensions (mm)           | 1270 x 70 x 75 | 1270 x 110 x 72 | 1565 x 70 x 75 | 1565 x 110 x 72 | 1867 x 70 x 75 | 1867 x 110 x 72 |
| Microwave                 | CH2-4SNMW      | CH2-4TNMW       | CH2-5SNMW      | CH2-5TNMW       | CH2-6SNMW      | CH2-6TNMW       |
| 3Hr Emergency             | CH2-4SNEM      | CH2-4TNEM       | CH2-5SNEM      | CH2-5TNEM       | CH2-6SNEM      | CH2-6TNEM       |
| 3Hr Emergency & Microwave | CH2-4SNEMMW    | CH2-4TNEMMW     | CH2-5SNEMMW    | CH2-5TNEMMW     | CH2-6SNEMMW    | CH2-6TNEMMW     |

## Rapide

- Quick and easy to install with low maintenance costs
- Stainless steel clips and mounting brackets
- Suitable for indoor or outdoor use
- Complete with fixing accessories
- Emergency version - add suffix/EM
- Dimmable version available
- 5 year warranty

**120°**

**220-240V**

**30,000**

**Available**

**5000K**

**CRI >80**

**IP 65**

Emergency

|                 | 4ft Single       | 4ft Twin          | 5ft Single       | 5ft Twin          | 6ft Single       | 6ft Twin          |
|-----------------|------------------|-------------------|------------------|-------------------|------------------|-------------------|
| Part Number     | RAP124/LED/850   | RAP224/LED/850    | RAP140/LED/850   | RAP240/LED/850    | RAP148/LED/850   | RAP248/LED/850    |
| Watt            | 24W              | 48W               | 40W              | 80W               | 48W              | 96W               |
| Lumens          | 2400             | 4800              | 4000             | 8000              | 4800             | 9600              |
| Dimensions (mm) | 1232 x 85 x 77.5 | 1232 x 103 x 77.5 | 1532 x 85 x 77.5 | 1532 x 103 x 77.5 | 1800 x 85 x 77.5 | 1800 x 103 x 77.5 |


Beeston

- Suspension kit = **BE-SUSKIT**
- Microwave version available
- Daylight harvesting available
- Step dimming available
- High bay/low bay
- 3 year warranty



Diffuser must be ordered separately

|                 |                 |                 |                 |
|-----------------|-----------------|-----------------|-----------------|
| Part Number     | <b>BE1-110C</b> | <b>BE1-165C</b> | <b>BE1-225C</b> |
| Emergency Pack  | <b>BE-EM110</b> | <b>BE-EM165</b> | <b>BE-EM225</b> |
| Diffuser        | <b>BE-FD110</b> | <b>BE-FD165</b> | <b>BE-FD225</b> |
| Watt            | 110W            | 165W            | 225W            |
| Lumens          | 14300           | 21450           | 29250           |
| Dimensions (mm) | 605 x 320 x 96  | 605 x 440 x 96  | 1200 x 440 x 96 |

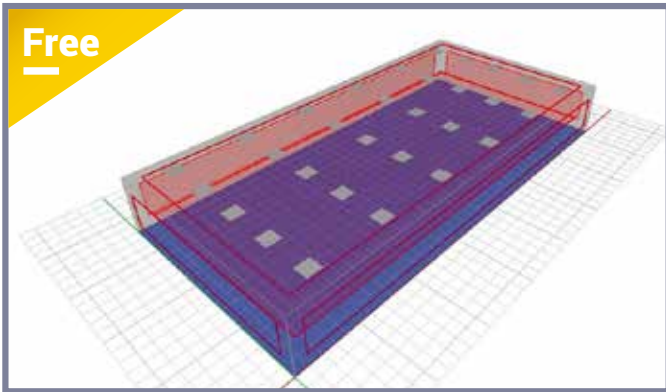

Free  
Lighting & Energy  
Calculation  
Service Available


Contact us for further information

Gawsworth II

- Suspension kit = **GA-SUSKIT**
- Microwave version available
- Daylight harvesting available
- Step dimming available
- Emergency available
- 5 year warranty



|                 |                 |                 |                 |
|-----------------|-----------------|-----------------|-----------------|
| Part Number     | <b>GA2-100C</b> | <b>GA2-150C</b> | <b>GA2-200C</b> |
| Watt            | 100W            | 150W            | 200W            |
| Lumens          | 12000           | 18000           | 24000           |
| Dimensions (mm) | ø 280 x 185     | ø 320 x 187     | ø 400 x 208     |

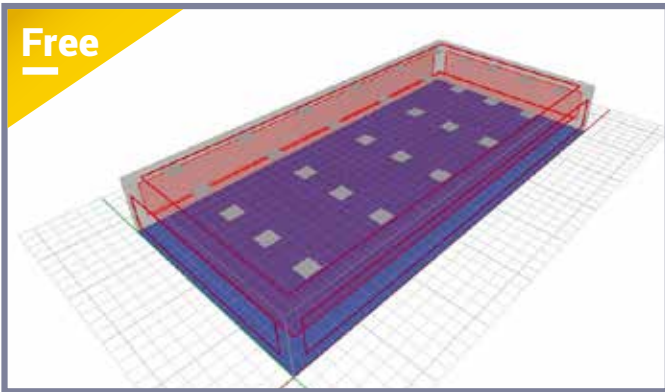

Free  
Lighting & Energy  
Calculation  
Service Available

Contact us for further information



# Floodlights

## Tatton Slimline

- Angled bracket for easy installation
- Supplied with 1m cable
- For connectors and brackets - see page 33
- 2 year warranty

  
110°

  
200-240V

  
25,000

  
No

  
6000K

PIR with 4th WIRE for manual override or slave




All Tatton Floodlights include an angled bracket for easy installation

|                    |                |                |                |                |
|--------------------|----------------|----------------|----------------|----------------|
| Without PIR (IP65) | TA1-10C        | TA1-20C        | TA1-30C        | TA1-50C        |
| With PIR (IP44)    | TA1-10CP       | TA1-20CP       | TA1-30CP       | TA1-50CP       |
| Watt               | 10W            | 20W            | 30W            | 50W            |
| Lumens             | 775            | 1525           | 2350           | 4350           |
| Dimensions (mm)    |                |                |                |                |
| Without PIR        | 104 x 125 x 27 | 125 x 152 x 28 | 168 x 209 x 27 | 200 x 237 x 36 |
| With PIR           | 104 x 165 x 55 | 125 x 189 x 55 | 168 x 252 x 54 | 200 x 287 x 57 |


CRI >80  
IP 65

# Celsian III

- Recommended for outdoor and industrial use
- Supplied with 1m cable
- Available with polycarbonate lens - add PC after CE3 e.g. CE3PC
- For connectors and brackets -see page 33
- With PIR - 2 year warranty
- Without PIR - 3 year warranty



PIR with 4th WIRE for manual override or slave

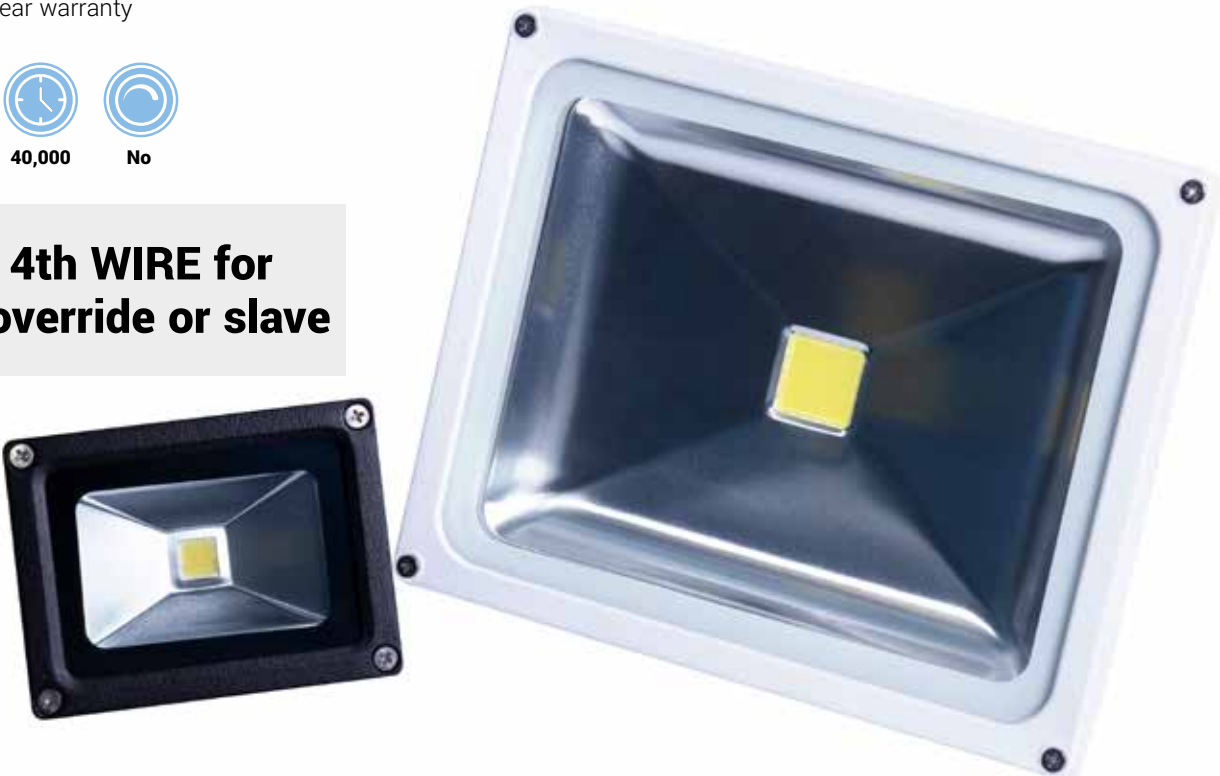


| Case Colour        | LED Colour   | 10W                | 20W             | 30W             | 50W             |
|--------------------|--------------|--------------------|-----------------|-----------------|-----------------|
| Without PIR (IP65) |              |                    |                 |                 |                 |
| Black              | Cool (6000K) | CE3-1000CMINI      | CE3-2000C       | CE3-3000C       | CE3-5000C       |
| Black              | Warm (3000K) | CE3-1000WMINI      | CE3-2000W       | CE3-3000W       | CE3-5000W       |
| White              | Cool (6000K) | CE3-1000CMINIWHITE | CE3-2000CWHITE  | CE3-3000CWHITE  | CE3-5000CWHITE  |
| White              | Warm (3000K) | CE3-1000WMINIWHITE | CE3-2000WWHITE  | CE3-3000WWHITE  | CE3-5000WWHITE  |
| With PIR (IP54)    |              |                    |                 |                 |                 |
| Black              | Cool (6000K) | CE3-1000CP         | CE3-2000CP      | CE3-3000CP      | CE3-5000CP      |
| Black              | Warm (3000K) | CE3-1000WP         | CE3-2000WP      | CE3-3000WP      | CE3-5000WP      |
| White              | Cool (6000K) | CE3-1000CPWHITE    | CE3-2000CPWHITE | CE3-3000CPWHITE | CE3-5000CPWHITE |
| White              | Warm (3000K) | CE3-1000WPWHITE    | CE3-2000WPWHITE | CE3-3000WPWHITE | CE3-5000WPWHITE |

|               |                 |                 |                 |                 |                 |
|---------------|-----------------|-----------------|-----------------|-----------------|-----------------|
| All CE3 Range |                 |                 |                 |                 |                 |
| Cool (6000K)  | Lumens          | 750             | 1500            | 2350            | 3750            |
| Warm (3000K)  | Lumens          | 700             | 1400            | 2250            | 3500            |
| Without PIR   | Dimensions (mm) | 113 x 95 x 71   | 180 x 155 x 90  | 224 x 190 x 101 | 285 x 234 x 115 |
| With PIR      | Dimensions (mm) | 113 x 173 x 105 | 180 x 200 x 110 | 224 x 253 x 101 | 285 x 289 x 115 |
| All           | Consumed Power  | 10W             | 22W             | 31W             | 51W             |



# Celsian V with PIR Socket

- Plugin PIR available
- Recommended for outdoor and industrial use
- Supplied with 1m cable
- For connectors and brackets - see page 33
- 5 year warranty



|                 |                |                |                |                |                 |
|-----------------|----------------|----------------|----------------|----------------|-----------------|
| Cool (6000K)    | CE5-1000C      | CE5-2000C      | CE5-3000C      | CE5-5000C      | CE5-PIR         |
| Warm (3000K)    | CE5-1000W      | CE5-2000W      | CE5-3000W      | CE5-5000W      |                 |
| Watt            | 10W            | 20W            | 30W            | 50W            | PIR             |
| Lumens (6000K)  | 770            | 1540           | 2310           | 3850           |                 |
| Lumens (3000K)  | 700            | 1450           | 2150           | 3550           |                 |
| Dimensions (mm) | 194 X 128 X 45 | 268 X 202 X 55 | 294 X 243 X 59 | 395 X 301 X 72 | 170 x 170 x 110 |
| Consumed Power  | 11W            | 21W            | 31W            | 52W            |                 |






# High Powered Floodlights

## Celsian III 80-100W

- Recommended for outdoor and industrial use
- Supplied with 1m cable
- Available with polycarbonate lens add PC after CE3 e.g. CE3PC
- For connectors and brackets - see page 33
- 3 year warranty




| Part Number     | CE3-8000C       | CE3-10000C     |
|-----------------|-----------------|----------------|
| Watt            | 80W             | 100W           |
| Lumens          | 6000            | 7500           |
| Dimensions (mm) | 288 x 379 x 110 | 288 x 383 x 99 |
| Consumed Power  | 87W             | 101W           |



CRI >70  
IP 65

## Celsian IV 150-200W

- High quality heatsink design
- Recommended for outdoor and industrial use
- 3 year warranty



| Part Number     | CE4-150C        | CE4-200C        |
|-----------------|-----------------|-----------------|
| Watt            | 150W            | 200W            |
| Lumens          | 12000           | 15200           |
| Dimensions (mm) | 457 x 320 x 106 | 499 x 370 x 105 |
| Consumed Power  | 152.5W          | 202W            |




CRI >70  
IP 65

## Celsian IV SMD 80-200W

NEW

- SMD LED with driver on board
- High quality heatsink design
- Recommended for outdoor and industrial use
- 2 year warranty



| Part Number     | CE4S-80C       | CE4S-100C      | CE4S-150C       | CE4S-200C       |
|-----------------|----------------|----------------|-----------------|-----------------|
| Watt            | 80W            | 100W           | 150W            | 200W            |
| Lumens          | 6400           | 8000           | 12000           | 16000           |
| Dimensions (mm) | 287 x 370 x 93 | 391 x 317 x 95 | 457 x 320 x 106 | 499 x 370 x 105 |




CRI >70  
IP 65

## Tatton Slimline 80-200W

NEW

- SMD LED with driver on board
- Recommended for outdoor and industrial use
- Angled bracket for easy installation
- 2 year warranty



| Part Number     | TA1-80C        | TA1-100C       | TA1-150C       | TA1-200C       |
|-----------------|----------------|----------------|----------------|----------------|
| Watt            | 80W            | 100W           | 150W           | 200W           |
| Lumens          | 6400           | 8000           | 12500          | 16100          |
| Dimensions (mm) | 282 x 321 x 38 | 282 x 321 x 38 | 333 x 420 x 51 | 470 x 385 x 51 |



All Tatton Floodlights include an angled bracket for easy installation

CRI >70  
IP 65

# Celsian IV Photocell



- Dusk to dawn operation
- Supplied with 1m cable
- Recommended for outdoor and industrial use
- For connectors and brackets - see page 33
- 3 year warranty



| Part Number     | CE4P-30C       | CE4P-50C        | CE4P-80C       | CE4P-100C      | CE4P-150C       |
|-----------------|----------------|-----------------|----------------|----------------|-----------------|
| Watt            | 30W            | 50W             | 80W            | 100W           | 150W            |
| Lumens          | 2280           | 3800            | 6200           | 7500           | 12000           |
| Dimmensions(mm) | 175 x 214 x 77 | 175 x 241 x 101 | 287 x 370 x 93 | 391 x 317 x 95 | 457 x 320 x 106 |

CRI >70

IP 65

# Remote Control Floodlights

## Saxon RGB

- Setting retained when power off
- Full IR remote control
- 340° bracket rotation
- 1m cable
- Recommended for outdoor and industrial use
- For connectors and brackets - see page 33
- 3 year warranty

|                 |                |
|-----------------|----------------|
| Part Number     | SX1-30RGB      |
| Watt            | 30W            |
| Lumens          | 610 MAX        |
| Dimensions (mm) | 195 x 278 x 62 |



CRI >70

IP 65

## Grange Tablet Style

- Multi-function remote control
- 1m cable
- Recommended for outdoor and industrial use
- Includes microwave sensor and photocell functions
- For connectors and brackets - see page 33
- 2 year warranty

| Part Number | GR1-20CRC      | GR1-30CRC      |
|-------------|----------------|----------------|
| Watt        | 20W            | 30W            |
| Lumens      | 1500           | 2250           |
| Dimensions  | 180 x 126 x 36 | 210 x 147 x 37 |



CRI >70

IP 65



# Coastal & Anti-Corrosive

- Suitable for use in harsh environments
- Supplied with 1m cable
- For connectors and brackets - see page 33
- Manufactured and approved to withstand corrosive and marine environments
- Contact sales for resistance specification
- Recommended for outdoor and industrial use
- 5 year warranty



| Part Number     | C01-1000C     | C01-3000C       | C01-5000C       | C01-8000C       |
|-----------------|---------------|-----------------|-----------------|-----------------|
| Watt            | 10W           | 30W             | 50W             | 80W             |
| Lumens          | 800           | 2400            | 4000            | 6400            |
| Dimmensions(mm) | 115 x 86 x 87 | 225 x 185 x 125 | 288 x 238 x 150 | 288 x 360 x 110 |
| Consummed Power | 11W           | 34W             | 55W             | 85W             |



# Portable Floodlights & Accessories

## Celsian Portable

- Includes 240VAC wall charger and car charger
- With Magnetic Feet = **CE3-10CBYMF**
- Replacement charger = **CE3-CHARGER**
- 2 year warranty



|                 |                 |
|-----------------|-----------------|
| Part Number     | CE3-10CBY       |
| Colour          | Cool            |
| Watt            | 10W             |
| Lumens          | 700             |
| Battery         | 2200mAH         |
| Operating Time  | 150min          |
| Charge Time     | 270min          |
| Dimensions (mm) | 146 x 236 x 169 |




## Connectors

| Part Number     | CE-CONN2         | CE-TCONNECTOR    |
|-----------------|------------------|------------------|
| Poles           | 3                | 3                |
| Max Current     | 16A              | 16A              |
| Max Conductor   | 4mm <sup>2</sup> | 4mm <sup>2</sup> |
| Min Cable       | 7mm              | 7mm              |
| Max Cable       | 13.5mm           | 13.5mm           |
| Dimensions (mm) | 81 x 24          | 80 x 98          |



## Brackets and Ground Spike

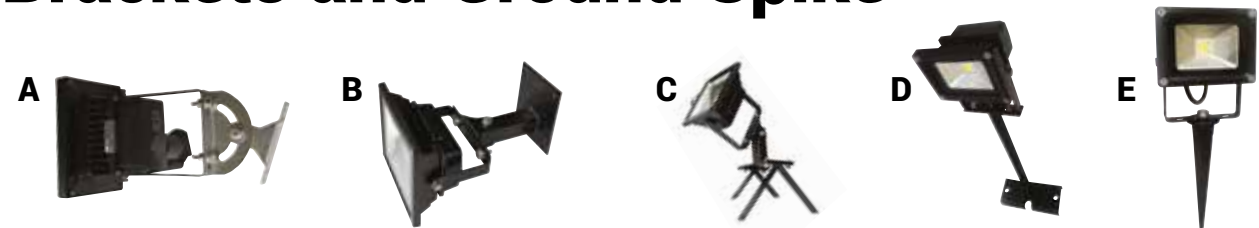

| Part Number     | CE-BRACKET1 | CE-BRACKET2      | CE-ADAPTBRACKET                 | CE-SIGNBRACKET | CE-GROUNDSPIKE |
|-----------------|-------------|------------------|---------------------------------|----------------|----------------|
| Image           | A           | B                | C                               | D              | E              |
| Suitable Floods | 10W/20W     | 30W/50W/80W/100W | For corner use with CE-BRACKET2 | 10W/20W        | 10W/20W/30W    |
| Max Weight      | 1Kg         | 6Kg              | 6Kg                             | 1Kg            | 1.8Kg          |
| Dimensions (mm) | 95 x 75     | 180 x 160        | 255 x 130                       | 325 x 140      | 170 x 45       |



# Outdoor

## Argus Street Light

- Die cast aluminium housing
- Various pole sizes and attachments available
- Meanwell driver
- 3 year warranty



| Part Number     | ARG30/LED/V2/740 | ARG50/LED/V2/740 | ARG80/LED/V2/740 |
|-----------------|------------------|------------------|------------------|
| Watt            | 30W              | 50W              | 80W              |
| Colour Temp     | 4000K            | 4000K            | 4000K            |
| Lumens          | 2350             | 4000             | 6400             |
| Dimensions (mm) | 518 x 228 x 114  | 518 x 228 x 114  | 750 x 322 x 145  |
| Max. Pole (mm)  | Ø 54             | Ø 54             | Ø 65             |

CRI >70  
IP 65

## Starlight Bollard

- Extruded aluminium body
- Domed cover. Matt black finish
- J bolt kit = **STW/JBOLT**
- Root mounting kit = **STW/RMKIT**
- 5 year warranty

| Part Number     | STL25/LED/BK/740 |
|-----------------|------------------|
| Watt            | 25W              |
| Colour Temp     | 4000K            |
| Lumens          | 2240             |
| Dimensions (mm) | 1m (H) x Ø 168   |

CRI >70  
IP 65



## Twilight Bollard

- Extruded aluminium body
- Matt black finish
- J bolt kit = **STW/JBOLT**
- Root mounting kit = **STW/RMKIT**
- 5 year warranty

| Part Number     | TWL25/LED/BK/740 |
|-----------------|------------------|
| Watt            | 25W              |
| Colour Temp     | 4000K            |
| Lumens          | 750              |
| Dimensions (mm) | 1m (H) x Ø 168   |

CRI >70  
IP 65



# Lamps



## Topaz R63 & R80

• 2 year warranty



120°



220-260V



25,000



No



3000K



INDOOR  
USE ONLY



NOT SUITABLE FOR  
ACCENT LIGHTING



CRI >80

|                 |            |            |
|-----------------|------------|------------|
| Part Number     | TR63-2700W | TR80-2700W |
| Watt            | 8W         | 12W        |
| ~Incandescent   | 48W        | 60W        |
| Lumens          | 600        | 810        |
| Dimensions (mm) | 103 x 63   | 112 x 77   |



## Lyra I

- See website for suitable dimmers
- Equivalent to 60W incandescent
- 2 year warranty



200°



220-240V



15,000



See  
Table



See  
Table

| Non-Dimmable    |           |           |
|-----------------|-----------|-----------|
| Part Number     | LY1-2200W | LY1-2700W |
| Watt            | 10W       | 10W       |
| Fitting         | B22       | E27       |
| Colour Temp     | 3000K     | 3000K     |
| Lumens          | 810       | 810       |
| Dimensions (mm) | 118 x 60  | 118 x 60  |

| Dimmable        |            |            |            |            |
|-----------------|------------|------------|------------|------------|
| Part Number     | LY1-2200WD | LY1-2200CD | LY1-2700WD | LY1-2700CD |
| Watt            | 10W        | 10W        | 10W        | 10W        |
| Fitting         | B22        | B22        | E27        | E27        |
| Colour Temp     | 3000K      | 5000K      | 3000K      | 5000K      |
| Lumens          | 810        | 850        | 810        | 810        |
| Dimensions (mm) | 118 x 60   | 118 x 60   | 118 x 60   | 118 x 60   |



INDOOR  
USE ONLY



NOT SUITABLE FOR  
ACCENT LIGHTING



CRI >80



# Lyra II

- Equivalent to 88W incandescent
- 2 year warranty

**180°**

**220-260V**

**25,000**

**No**


**3000K**

| Part Number     | LY2-2200W | LY2-2700W |
|-----------------|-----------|-----------|
| Watt            | 16W       | 16W       |
| Fitting         | B22       | E27       |
| Lumens          | 1300      | 1300      |
| Dimensions (mm) | 135 x 68  | 137 x 68  |

**INDOOR  
USE ONLY**

**NOT SUITABLE FOR  
ACCENT LIGHTING**

**CRI >80**



# Sirius III

- Equivalent to 30W incandescent
- 2 year warranty

**250°**

**100-260V**

**25,000**

**No**


**See Table**

| Part Number     | SC3-2200W | SC3-2200C | SC3-1400W | SC3-1400C | SC3-2700W | SC3-2700C |
|-----------------|-----------|-----------|-----------|-----------|-----------|-----------|
| Watt            | 4W        | 4W        | 4W        | 4W        | 4W        | 4W        |
| Fitting         | B22       | B22       | E14       | E14       | E27       | E27       |
| Colour Temp     | 3000K     | 5000K     | 3000K     | 5000K     | 3000K     | 5000K     |
| Lumens          | 300       | 300       | 300       | 300       | 300       | 300       |
| Dimensions (mm) | 93 x 35   | 93 x 35   | 101 x 35  | 101 x 35  | 96 x 35   | 96 x 35   |

**INDOOR  
USE ONLY**

**NOT SUITABLE FOR  
ACCENT LIGHTING**

**CRI >80**



# Mira Golf III

- Equivalent to 30W incandescent
- 2 year warranty

**150°**

**100-260V**

**25,000**

**No**


**See Table**

| Part Number     | MG3-2200W | MG3-2200C | MG3-1400W | MG3-1400C | MG3-2700W | MG3-2700C |
|-----------------|-----------|-----------|-----------|-----------|-----------|-----------|
| Watt            | 4W        | 4W        | 4W        | 4W        | 4W        | 4W        |
| Fitting         | B22       | B22       | E14       | E14       | E27       | E27       |
| Colour Temp     | 3000K     | 5000K     | 3000K     | 5000K     | 3000K     | 5000K     |
| Lumens          | 350       | 350       | 350       | 350       | 350       | 350       |
| Dimensions (mm) | 71 x 45   | 71 x 45   | 79 x 45   | 79 x 45   | 73 x 45   | 73 x 45   |

**INDOOR  
USE ONLY**

**NOT SUITABLE FOR  
ACCENT LIGHTING**

**CRI >80**



# Capella II

- Triac dimmable
- See website for suitable dimmers
- Replaces a 50W halogen lamp
- 2 year warranty

**36°**

**220-260V**

**25,000**

**Yes**

**See Table**

| Part Number     | CA2-1000C | CA2-1000W |
|-----------------|-----------|-----------|
| Watt            | 6.5W      | 6.5W      |
| Colour Temp     | 6500K     | 3000K     |
| Lumens          | 440       | 410       |
| Dimensions (mm) | 50 x 56   | 50 x 56   |

**INDOOR  
USE ONLY**

**CRI >80**





# Titan II

- Replaces a 50W halogen lamp
- 2 year warranty

**45°**

**175-250V**

**25,000**

**No**

**See Table**

| Part Number     | TT2-10CW | TT2-10WW |
|-----------------|----------|----------|
| Watt            | 5W       | 5W       |
| Colour Temp     | 6000K    | 3000K    |
| Lumens          | 346      | 346      |
| Dimensions (mm) | 50 x 55  | 50 x 55  |

**INDOOR USE ONLY**

**CRI >80**



GU10  
CONNECTION

# Gemini II

- Driver included
- Indoor use
- Wide beam angle
- Not suitable for accent lighting
- 3 year warranty

**85°**

**100-260V**

**30,000**

**No**

**See Table**


|                 | Warm (3000K) | Cool (6500K) |
|-----------------|--------------|--------------|
| Chrome          | GE2-DLC-W    | GE2-DLC-C    |
| White           | GE2-DLW-W    | GE2-DLW-C    |
| Brushed Chrome  | GE2-DLBC-W   | GE2-DLBC-C   |
| Watt            | 8W           | 8W           |
| Lumens          | 580          | 600          |
| Cut-Out (mm)    | Ø 85         | Ø 85         |
| Dimensions (mm) | Ø 98 x 40    | Ø 98 x 40    |

**NOT SUITABLE FOR ACCENT LIGHTING**

**INDOOR USE ONLY**

**CRI >80**

**IP 20**

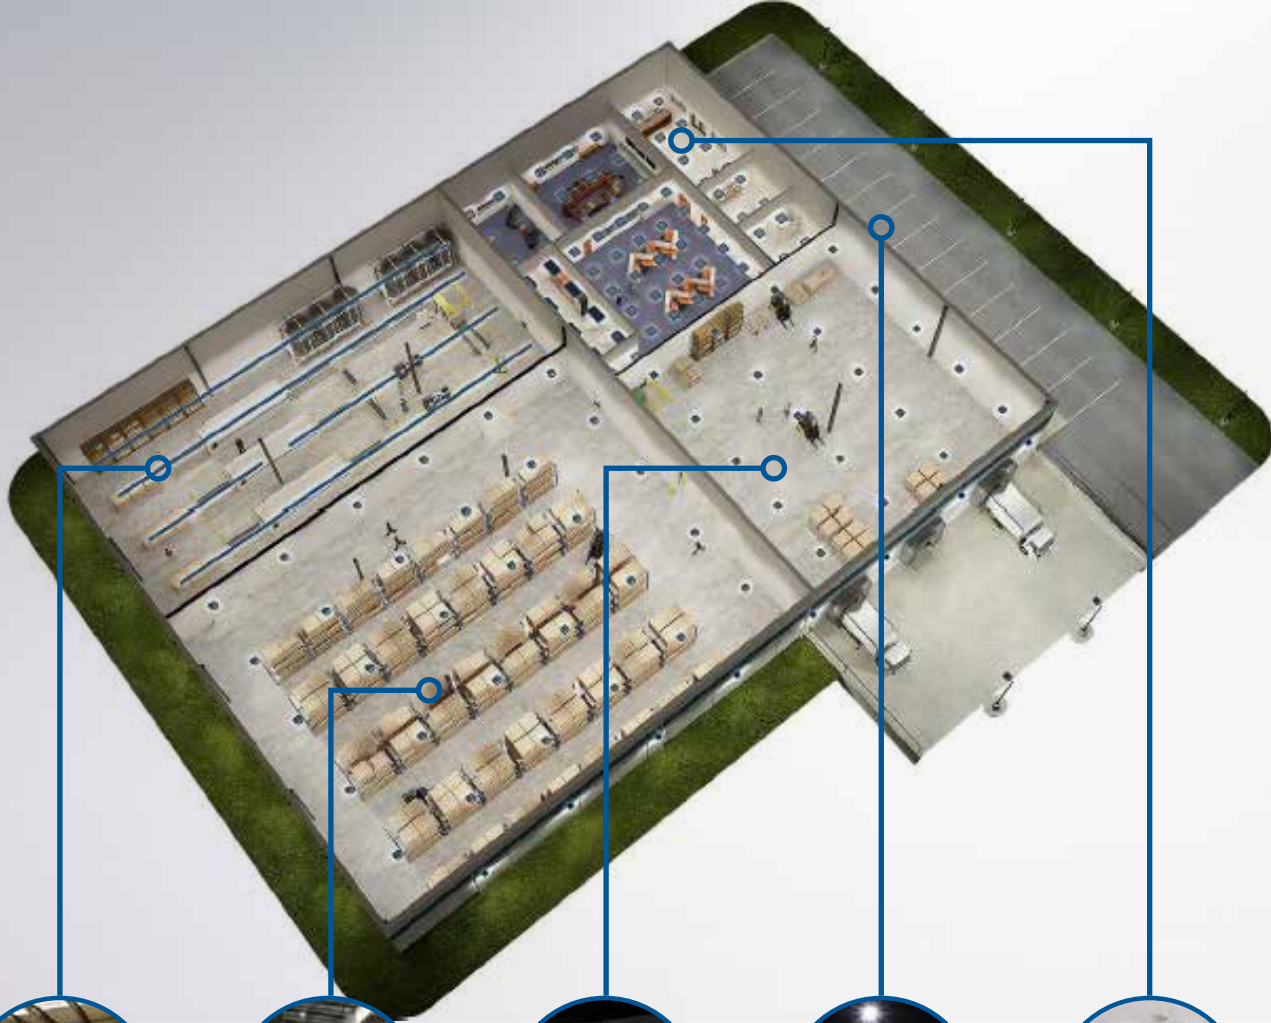

### Production Spaces

- Working spaces
- Walkways



### Warehouse Spaces

- Storage areas
- Aisles



### Receiving & Shipping

- Loading bays indoor/outdoor
- Manoeuvring area



### Outdoor Areas

- Covered car parks
- Car parks
- Perimeter lighting
- Walkways
- Building Entrances



### Office Spaces

- Executive offices
- Open office / cubicles
- Cafeteria
- Corridors
- Storage rooms
- Restrooms

CREE

## Industrial Space Work Space & Outdoor Area Lighting

Contact sales for more information  
T: 01260 292 640 | [sales@diamondledlighting.co.uk](mailto:sales@diamondledlighting.co.uk)

**UP TO  
10 YEARS  
WARRANTY**



# Emergency

## Capri

- Suitable for maintained and non maintained applications
- White polycarbonate body and cover
- Supplied with a pack of four self-adhesive legends
- 3 year warranty (excluding battery)



|                 |                  |
|-----------------|------------------|
| Part Number     | <b>CPEM-M</b>    |
| Watt            | 4W               |
| Type            | Maintained       |
| Lumens          | 180              |
| Emergency Time  | 3 hours          |
| Battery         | Ni-CD 3.6V 1.6Ah |
| Dimensions (mm) | 352 x 110 x 65   |



## Sage Twin Spot

- 3 hours duration
- Ni-Cd 3.6V battery cells
- Non maintained
- Operating temp 0-40°C
- 5 year warranty
- 1 year warranty for battery



NEW

|                 |                |
|-----------------|----------------|
| Part Number     | <b>SAG-NM3</b> |
| Watt            | 2 x 3W         |
| Total Lumens    | 385            |
| Dimensions (mm) | 309 x 280 x 59 |





# Scorpio Twin Spot

- White polycarbonate body
- Light weight
- Self test function
- 5 year warranty (excluding battery)



| Part Number     | EMRTS/LED      |
|-----------------|----------------|
| Watt            | 2 x 3W         |
| Type            | Non-maintained |
| Lumens          | 205 lm/ lamp   |
| Emergency Time  | 3 hours        |
| Battery         | Ni-Cd 3.6V 6Ah |
| Dimensions (mm) | 294 x 300 x 73 |



# Artemis

- Supplied with up arrow legend
- Right and left legends available separately
- 3 hours duration
- Ni-Cd 3.6V battery cells
- Maintained corridor version available
- Corridor version available
- 3 year warranty
- 1 year warranty for battery



| Part Number     | ART-M3U        |
|-----------------|----------------|
| Watt            | 3W             |
| Lumens          | 130            |
| Dimensions (mm) | 390 x 190 x 62 |



# Selene

- 3 hours duration
- Ni-Cd 3.6V battery cells
- Maintained corridor version available
- Corridor version available
- Legend set supplied
- 3 year warranty
- 1 year warranty for battery



|                 | Surface Mount         | Suspended      |
|-----------------|-----------------------|----------------|
| Part Number     | SEL-SMM3              | SEL-SUM3       |
| Watt            | 3W                    | 3W             |
| Dimensions (mm) | 310 x 230 x 35        | 300 x 700 x 45 |
|                 | Wall or Ceiling Mount |                |



# Odin Open Area Downlight

- Compact slim design
- 3 hours duration
- Ni-Cd 3.6V battery cells
- Non maintained
- Corridor version available
- 3 year warranty
- 1 year warranty for battery



|              |          |
|--------------|----------|
| Part Number  | OD1-3WOC |
| Watt         | 3W       |
| Lumens       | 130      |
| Cut Out (mm) | Ø33      |



# Halo Emergency Fitting

- Momentary manual test button fitted
- Moulded polycarbonate body
- 5 year warranty (excluding battery)



| Part Number     | HAL2/LED/SURF/NM                           | HAL2/LED/SURF/OVAL/NM                  |
|-----------------|--------------------------------------------|----------------------------------------|
| Watt            | 2W                                         | 2W                                     |
| Type            | Non-maintained<br>Surface mount (Circular) | Non-maintained<br>Surface mount (Oval) |
| Lumens          | 104                                        | 104                                    |
| Emergency Time  | 3 hours                                    | 3 hours                                |
| Battery         | 3 cell battery pack                        | 3 cell battery pack                    |
| Dimensions (mm) | Ø 150 x 44                                 | Ø 150 x 44                             |



# Emergency Pack

- Suitable for use with Moonstone 5 and Elise series
- 5 year warranty (excluding battery)



|                 |                 |
|-----------------|-----------------|
| Part Number     | MS5-EM45W       |
| Watt            | 45W             |
| Charge Time     | 24 hours        |
| Emergency Time  | 3 hours         |
| Input Voltage   | 230VAC          |
| Battery         | Ni-CD 12V 3.0Ah |
| Dimensions (mm) | 330 x 102 x 43  |



# FREE Stockists Marketing Support\*



Diamond LED Lighting are committed to supporting our trade customers

We can supply you with complimentary Point of Sale (POS) and marketing tools to assist you in selling our products.



Next Day  
Delivery

For orders placed  
before 4pm



Carriage  
Paid

On any order  
over £150



Dedicated  
Sales Team

01260 292 640  
sales@diamondledlighting.co.uk



Technical  
Support

For advice and  
problem solving



Customer  
Services

For after sales care



Calculation  
Service

Contact us for  
more information



Open For  
Business

8:15am - 5:00pm  
Monday - Friday

To request marketing material or to discuss the various options that are available, please contact:

t: 01260 292 640 e: sales@diamondledlighting.co.uk

\*Free with a carriage paid order.  
[www.diamondledlighting.co.uk](http://www.diamondledlighting.co.uk)





**Diamond LED Lighting Limited**  
Unit 5, Congleton Trade Centre  
Radnor Park Trading Estate  
Back Lane, Congleton  
Cheshire CW12 4XJ

Tel: 01260 292 640  
Fax: 01260 279 116

Email: [sales@diamondledlighting.co.uk](mailto:sales@diamondledlighting.co.uk)  
[www.diamondledlighting.co.uk](http://www.diamondledlighting.co.uk)