




Axiom Bulkhead LED Instructions

IMPORTANT INSTALLATION INFORMATION This product must be installed in accordance with the latest edition of Building Regulations and carried out by a qualified electrician in accordance with the latest IEE Wiring Regulations. Before commencing any installation or maintenance work, ensure that the mains supply is switched off and the appropriate MCB or fuse is isolated.

MAINS WIRING Cable colours are shown opposite.

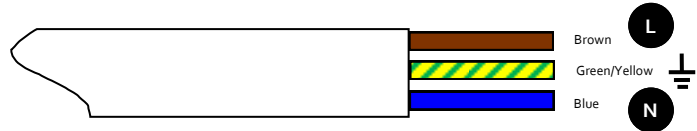

The Axiom Polycarbonate Bulkhead has two 20mm cable entry points, choose the entry point and remove with care the knock-out using a 20mm hole saw.

DO NOT USE A HAMMER.

This luminaire is of Class II construction - Double insulated. IP65 rated suitable for external applications. F marked, suitable for installation on to normal flammable surfaces. CE Approved. 180-240VAC supply.

6watt LED—4200K—550 lm



W: www.diamondledlighting.co.uk E: sales@diamondledlighting.co.uk

3 year warranty Rev A 10/5/2016



Axiom Bulkhead LED Instructions

IMPORTANT INSTALLATION INFORMATION This product must be installed in accordance with the latest edition of Building Regulations and carried out by a qualified electrician in accordance with the latest IEE Wiring Regulations. Before commencing any installation or maintenance work, ensure that the mains supply is switched off and the appropriate MCB or fuse is isolated.

MAINS WIRING Cable colours are shown opposite.



The Axiom Polycarbonate Bulkhead has two 20mm cable entry points, choose the entry point and remove with care the knock-out using a 20mm hole saw.

DO NOT USE A HAMMER.

This luminaire is of Class II construction - Double insulated. IP65 rated suitable for external applications. F marked, suitable for installation on to normal flammable surfaces. CE Approved. 180-240VAC supply.

6watt LED—4200K—550 lm



W: www.diamondledlighting.co.uk E: sales@diamondledlighting.co.uk

3 year warranty Rev A 10/5/2016