




Nova Tri Colour Slim Batten Instructions

IMPORTANT INSTALLATION INFORMATION This product must be installed in accordance with the latest edition of Building Regulations and carried out by a qualified electrician in accordance with the latest IEE Wiring Regulations. Before commencing any installation or maintenance work, ensure that the mains supply is switched off and the appropriate MCB or fuse is isolated.



Caution, risk of electric shock.

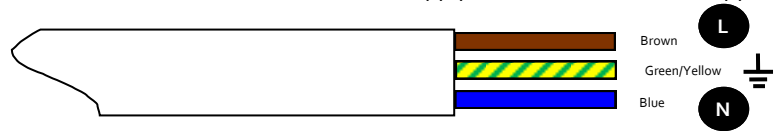

MAINS WIRING Cable colours are shown opposite.



The Nova Tri Colour slim batten is a Class I product and must be earthed. Colour temperature is switchable between 3000K, 4000K & 6000K at the time of installation by operating the switch on the rear of the Nova Tri Colour. CE Approved. 100-265VAC 40 Watt, 180-265 VAC 60 & 72 Watt 50/60Hz Supply. IP44 rated. Temperature rating, 0°C - +50°C. Available in 4ft, 5ft & 6ft. 40 Watt, 60 Watt & 72 Watt, Epistar LED's. **Installation:** Stainless steel fixing clips and screws are supplied with the fitting. Installation is just a case of ensuring the clips are parallel to each other.