


SPECIFICATION

Odin 2

Recessed LED Emergency Downlight

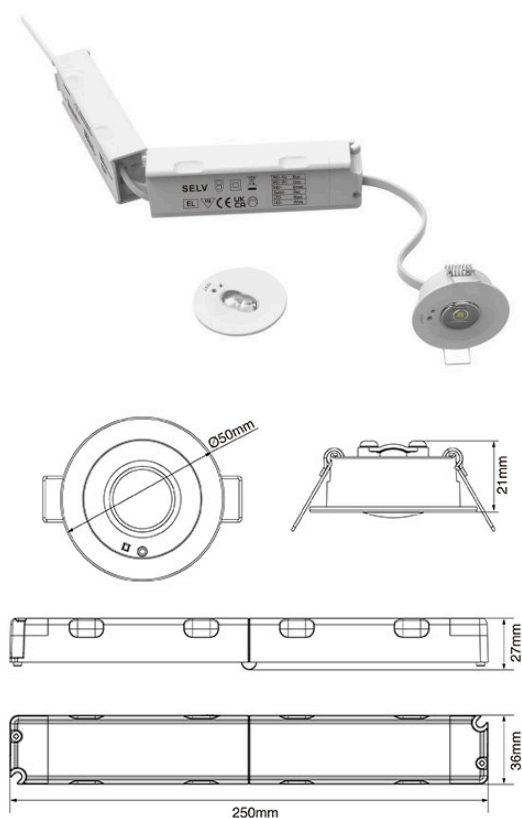

Open Area Version	OD2-W
Wattage	1.2W
Open Area Lumens	140
Corridor Lumens	160
Input Voltage	220-240V
Type	Non Maintained
Emergency Time	3 hours
Instant Light	Yes
IP Rating	IP20
Battery	LiFePO4 3.2V 1.5Ah
Cut-Out (mm)	Ø43-44mm
Lamp head	Ø50x21mm
Converter	50x27x36mm

Key Features

- Supplied with interchangeable open area/corridor lenses
- 3 hour duration
- LiFePO4 3.2V 1.5Ah
- Non maintained operation
- Recessed fitting
- 4 year warranty



Please Note: Product specifications are subject to change without notice. Product supplied may differ slightly in appearance from images shown on this website. Diamond LED Lighting reserve the right to update product specifications.

Tel: 01260 292 640 | Fax: 01260 279 116 | E-mail: sales@diamondledlighting.co.uk | Web: www.diamondledlighting.co.uk