




Select Trinity Tri Colour Batten Instructions



IMPORTANT INSTALLATION INFORMATION This product must be installed in accordance with the latest edition of Building Regulations and carried out by a qualified electrician in accordance with the latest IEE Wiring Regulations. Before commencing any installation or maintenance work, ensure that the mains supply is switched off and the appropriate MCB or fuse is isolated.

Caution, risk of electric shock.

MAINS WIRING Cable colours are shown opposite.

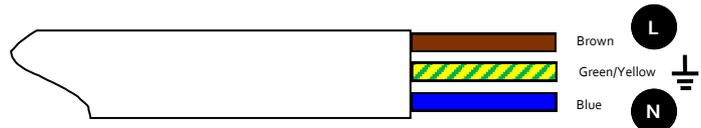

The Select Trinity is a Class I product and must be earthed. CE Approved. 220-240VAC, 50/60Hz Supply. IP20 rated. Operating temperature, -15°C ~+50°C.

Available in 4ft, 5ft & 6ft single and twin fittings. 30, 35, 45, 55 & 65 Watt models, LED colour temperature, 3000K, 4000K & 6000K. Options to suit most needs such as PIR presence sensor, Microwave detection, step dimming, corridor function and 3 hour emergency operation.

Installation:

- 1) Locate the three pinch point on either side of the batten, starting at one end, apply pressure with thumb and fingers placed on both sides. Once sufficient pressure is applied pull the two halves apart, next the middle and finally the other end.

Pinch Point



- 3) With the two halves separated, mounting of the back part to the chosen surface can be begin.
- 4) Connect the mains supply wiring, present the LED part of the batten to the back using the hanging straps. Connect the driver to the LED part.
- 5) Reconnect the mains supply, test the installation and select a colour setting of, 3000K, 4000K or 6000K.
- 6) Present the LED part to the rear part, secure the two halves with the M4 screws, fit the blanking plugs found inside the Select Trinity.

!!!IMPORTANT!!! Ensure the screws at either end are fully tightened.