


SPECIFICATION



Selene 2

Backlit LED Panel

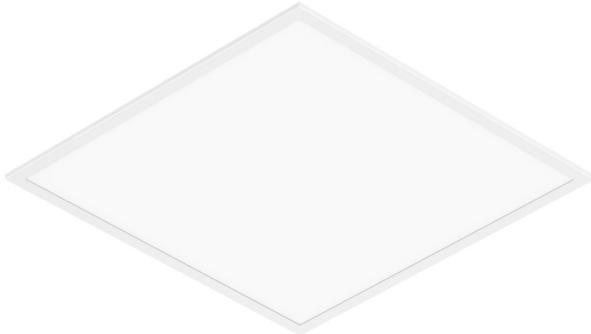

Beam Angle
110°



Input
220-240V



Life Hours
50000



Dimmable
No



Colour Temperature
3000K 4000K 6500K



	600 x 600	600 x 600	600x 600	1200 x 600	1200 x 600	600 x 300
Typ Rating	Typ(b)	Typ(a)	Typ(b)	Typ(a)	Typ(b)	Typ(b)
UGR	19		19			
Part Number	SE2B-28N	SE2A-36TU	SE2B-36T	SE2A-126TU	SE2B-126T	SE2B-123T
Max Power	28W	25/36W	25/36W	38/56W	38/56W	25/36W
Max Lumen	3480	3600	3600	5800	5800	3800
Dimensions (mm)	595 x 595 x 32	595 x 595 x 32	595 x 595 x 32	1195 x 595 x 33	1195 x 595 x 33	1195 x 595 x 33
CCT	4000K	3000K 4000K 6500K	3000K 4000K 6500K	3000K 4000K 6500K	3000K 4000K 6500K	3000K 4000K 6500K
Order Qty	6	1	1	1	1	1
Self Test Emergency Kit	SE-EM 3W					
Function	Self Test					
Panel Power	3-100W					
Output Voltage	9-80W					
Output Current	30-70mA					

Key Features

- Selectable 3 colour temperatures
- Selectable Power Option
- Tp(a) Panel UGR19 Standard
- Back Lit Panel
- Self Test Emergency Available
- No Light Guide
- Flicker free
- Surface Mount Kits Available