


SPECIFICATION



Selene 2

Backlit LED Panel

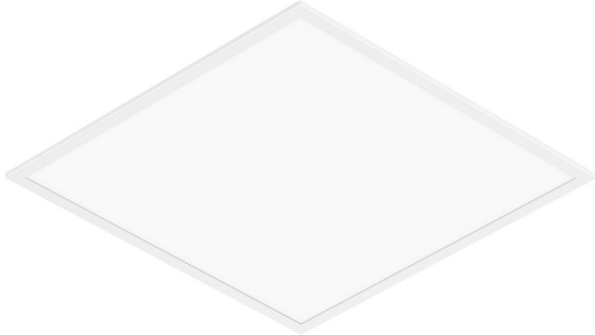

Beam Angle
110°



Input
220-240V



Life Hours
50000



Dimmable
No



Colour Temperature
3000K 4000K 6500K



	600x600 TP(a)	600x600 TP(b)	1200x600 TP(b)	600x300 TP(b)
Part Number	SE1A-36T	SE1B-36T	SE2B-126T	SE2B-123T
Max Power	25/36W	25/36W	40/58W	25/36W
Max Lumen	3600	3600	5800	3800
Dimensions (mm)	595 x 595 x 32	595 x 595 x 32	1195 x 59 5 x 33	1195 x 59 5 x 33
Self Test Emergency Kit	SE-EM3W			
Function	Self Test			
Panel Power	3-100W			
Output Voltage	9-80W			
Output Current	30-70mA			

Key Features

- Selectable 3 colour temperatures
- Selectable Power Option
- Back Lit Panel
- Fire Resistance Tp(a) or Tp(b)
- Self Test Emergency Available
- No Light Guide
- Flicker free
- Surface Mount Kits Available
- 5 year warranty



Please Note: Product specifications are subject to change without notice. Product supplied may differ slightly in appearance from images shown on this website. Diamond LED Lighting reserve the right to update product specifications.

Tel: 01260 292 640 | **Fax:** 01260 279 116 | **E-mail:** sales@diamondledlighting.co.uk | **Web:** www.diamondledlighting.co.uk