## **SPECIFICATION**

# Harvester 350



Improving crop health & reducing energy consumption, the Harvester range are die-cast luminaires that are engineered with precision and durability. Offering unparalleled performance and versatility for indoor plant cultivation. With a unique design that ensures even light distribution, with adjustable spectral blends that cater to your plants' specific needs.



#### Features

- Optimal light output angle
- Directly replaces 400W SON T Agro & MH lamps
- Dimming as standard
- Daylight linking system
- · Easily replaceable drivers
- IP66 water proof design
- Life span expected 75,000 hours +
- Robust design, easy to maintain
- Customisable & crop specific spectra available
- Asymmetric lens available for even plant bed distribution

### **Technical Details**

#### **Options and Accessories** WL Wireless Davlight Linked Control System 2m Suspension Cord Kit sus Unistrut Hook Bracket вкт AD DD 0-10V Dimming DALI Dimming PWM Dimming PD Medicinal Cannabis Spectra С s

LD


Solar Spectra Flying Lead Or Weiland RST2013S

#### Applications



Specification	HAV-350
Light Output PPF (µmol/s)	861.0
Calculated Efficiency (µmol/J)	2.46
PPFD (µmol/m²/s)	1179.0
Colour Rendering Index	90+
Light Output Depreciation	75,000 hrs L90 B10
Power Input	350W
Voltage Range	100-240V AC   Optional - 249-528V AC
Frequency Input Range	50-60 Hz
System Weight Complete	5.45KG
Ingress Protection	IP66
Cooling Method	Passive
Operating Temperature	-5°C – 40°C



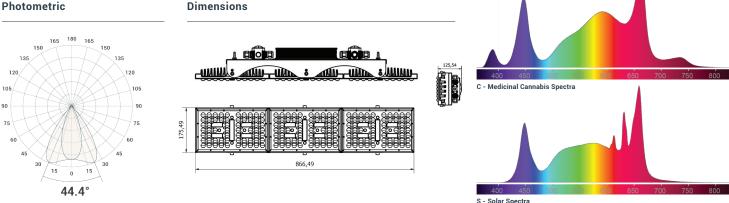

Please Note: Product specifications are subject to c hange without notice. Pr oduct supplied may diff er slightly in appearance from images shown on this website. Diamond LED Lighting reserve the right to update product specifications.

Tel: 01260 292 640 | Fax: 01260 279 116 | E-mail: sales@diamondledlighting.co.uk | Web: www.diamondledlighting.co.uk