

Lighting Columns



Lighting Columns, galvanised to BSEN 1461:2009 in accordance with BSEN1011.

Fitted wooden backboard as standard.

Root treatment, painting options available on request.



Flange Plated and Hinged options available

All steel columns are fully galvanised, with fitted wood back board

Standard door apertures are 500x1000mm for Non hinged Columns and 600x115mm for Mid Hinged

When installing columns, it is important they comply with BS EN 1991-1-410 requirements for the geographical location, calculation should be made to allow for windage of any fittings and any additional furniture such as signage and cameras.

Please contact the office for and accurate specification

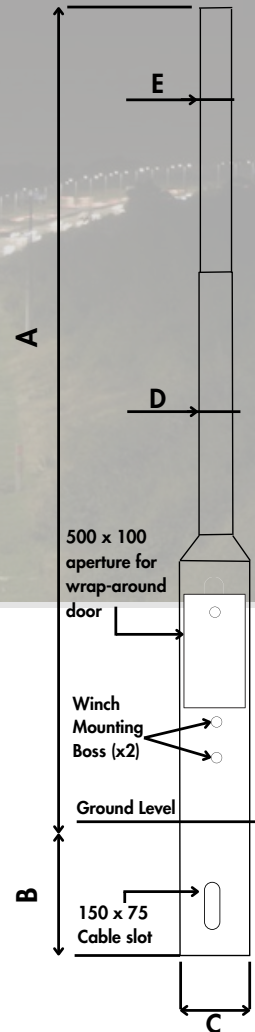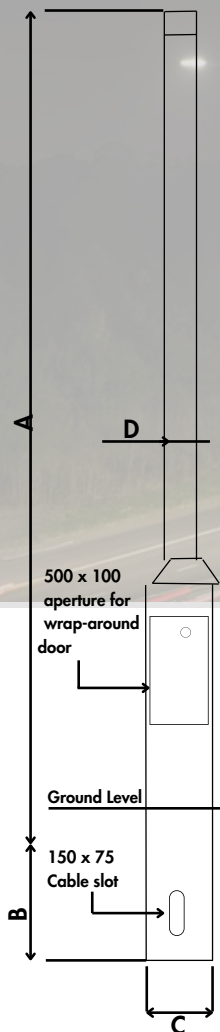

Part Number Guide

DSC – 8M – R -76 – STD – T - XX

Height Above Ground

3m
4m
5m
6m
7m

8m (89mm only)
10m (114mm only)

Mounting Type

R= Root
F= Flanged

Shaft Thickness

76=76mm
89=89mm
114=114mm

Hinged

No= STD
BAS=BASE
MID= MIDDLE

Style

T= Tubular
C= Conical

Special Coding

Such as painting.
Please contact the sales office

Tubular Post-Top

A Height Above Ground	B Root Below Ground	C Base Section Diameter	D Shaft Diameter	Overall Height
3M	800mm	140mm	76mm	3.8M
4M	1000mm	140mm	76mm	4.8M
5M	1000mm	140mm	76mm	5.8M
6M	1000mm	140mm	76mm	7M
8M	1200mm	168mm	89mm	9.2M
10M	1200mm	168mm	114mm	11.5M

Tubular Mid-Hinge

A Height Above Ground	B Root Below Ground	C Base Section Diameter	D Lower Shaft Diameter	E Upper Shaft Diameter	Overall Height
4M	1000mm	140mm	89mm	76mm	5M
5M	1000mm	140mm	89mm	76mm	6M
6M	1000mm	140mm	89mm	76mm	7M
8M	1200mm	168mm	89mm	76mm	^ 9.2M

Please Note: Product specifications are subject to change without notice. Product supplied may differ slightly in appearance from images shown on this website.

Diamond LED Lighting reserve the right to update product specifications.

Tel: 01260 292 640 | Fax: 01260 279 116 | E-mail: sales@diamondledlighting.co.uk | Web: www.diamondledlighting.co.uk

Lighting Accessories

CUT OUTS, FUSES AND PHOTOCELLS

Wide range of lighting accessories to suit all requirements.



DCA150	Fuse Cutout (6AMP Fuse Inc.)
DCA221	Twin Fuse Cutout
OS2-PCN	10A Photocell fo Nema Skt <5-15lux



FEEDER PILLARS & ENCLOSURES

A range of Feeder Pillars and Enclosures including single door, double door.
Many sizes available from stock.

COLUMN ACCESSORIES

Column door keys, flange plated column accessories including bolts and templates, mid-hinge column accessories.

DCAM8KEY	Standard Column Door Key
----------	--------------------------

