


SPECIFICATION



Selene II

3CCT - 2PWR - TP(a) UGR 19 Panel

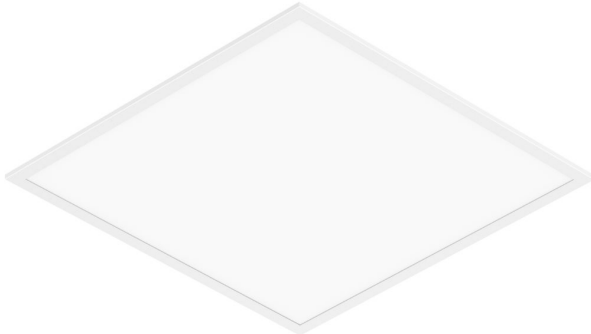

Beam Angle
90/120



Input
220-240V



Life Hours
50000



Dimmable
No



Colour Temperature
3000K 4000K 6500K



| | 600 x 600 | 1200 x 600 |
|--------------------------------|-----------------------|-----------------------|
| Part Number | SE2A-36TU | SE2A-126TU |
| Tp Rating | TP(a) | TP(a) |
| UGR | 19 | 19 |
| Selectable Power | 25/36W | 38/56W |
| Max Lumens | 4200 | 5800 |
| Beam Angle | 90 | 120 |
| CCT | 3000K 4000K 6500 K | 3000K 4000K 6500 K |
| Dimensions (mm) | 595 x 595 x 32 | 1195 x 595 x 33 |
| Surface Mounting Kits | SE2-CWM66 | SE2-CWM126 |
| Self Test Emergency Kit | SE-EM3W | |
| Panel Power | 3-100W | |
| Output Voltage | 9-80V | |
| Output Current | 30-70mA | |

Key Features

- Selectable 3 colour temperatures
- Selectable Power Option
- TP(a) Panel with UGR19 as Standard
- Back Lit Panel
- Self Test Emergency Available
- Flicker free
- Surface Mount Kits Available
- 5 year warranty



Please Note: Product specifications are subject to change without notice. Product supplied may differ slightly in appearance from images shown on this website. Diamond LED Lighting reserve the right to update product specifications.

Tel: 01260 292 640 | Fax: 01260 279 116 | E-mail: sales@diamondledlighting.co.uk | Web: www.diamondledlighting.co.uk