

210mm



Condor Dual Power Multi Colour Fire rating down light Installation Instructions



IMPORTANT INSTALLATION INFORMATION: This product must be installed in accordance with the latest edition of Building Regulations and carried out by a qualified electrician in accordance with the latest IEE Wiring Regulations. Before commencing any installation or maintenance work, ensure that the mains supply is switched off and the appropriate MCB or fuse is isolated.

Caution, risk of electric shock.

Condor Dual Power, Multi Colour Fire rating down light

A choice of four bezels are available, Chrome, Brushed Chrome, Black, Antique Brass.

Switch selectable colour's: 3000K(Warm White), 4000K(Neutral White), 5000K(Daylight) and 6500K(Cool White).

Switch selectable power: 6W, 8W Diamond recommend the Varilight®VPro JQP401W dimmer, operating a minimum of two and a maximum of 100 watts, i.e. 12. The Condor feature push fit connectors for ease of installation with loop in, loop out terminals.

Mains input voltage: 220-240VAC 50/60 Hz

Power consumption: 6 or 8 watts

Rated at IP65

Hole cut out $\phi 65-75\text{mm}$


CRI: $R_a > 80$

CCT: 3000K, 4000K, 5000K & 6500K

Lumen 6W: 600lm, 650lm, 700lm, 600lm

Lumen 8W: 800lm, 1000lm, 1000lm, 900lm

Fire rated mains fixed downlight
suitable for 30/60/90 minute
plasterboard ceilings.

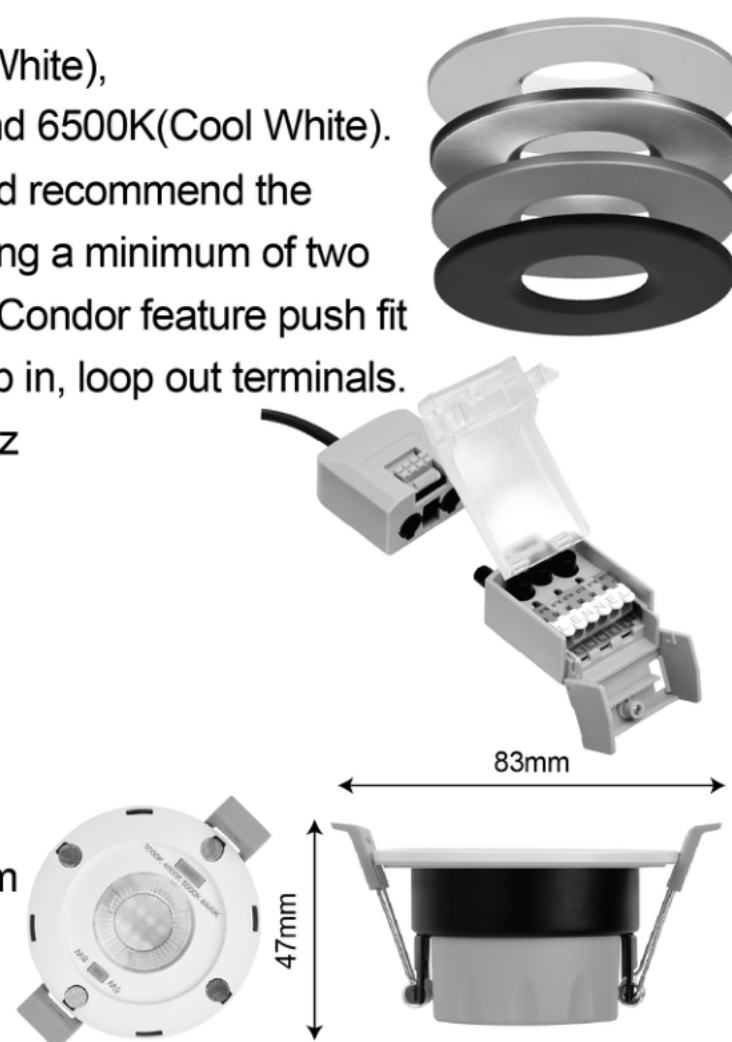








W: www.diamondledlighting.co.uk E: sales@diamondledlighting.co.uk

5 year warranty Rev A 15/6/2026

210mm



Condor Dual Power Multi Colour Fire rating down light Installation Instructions

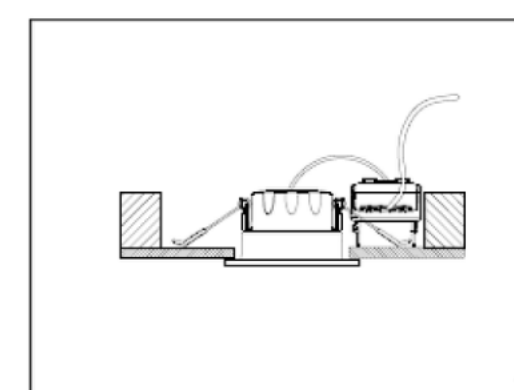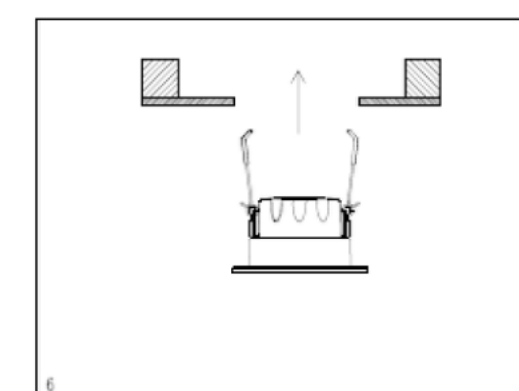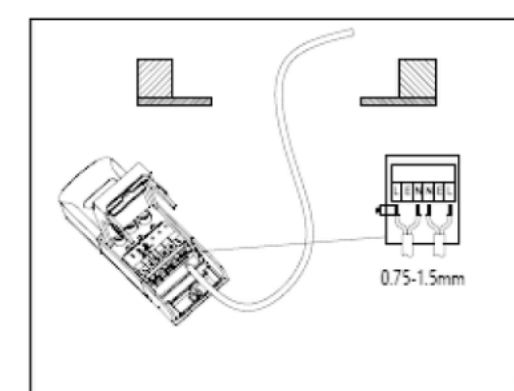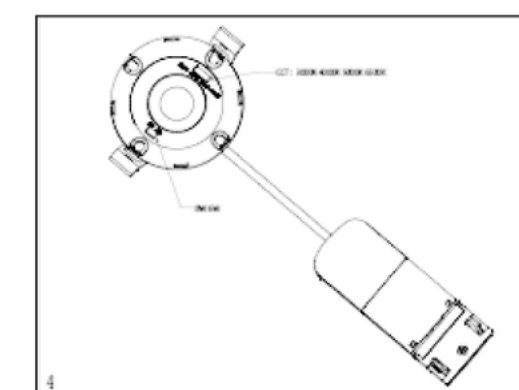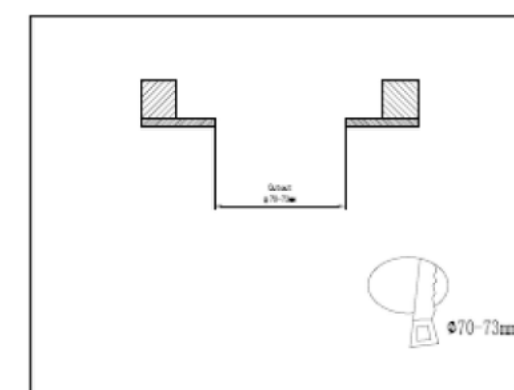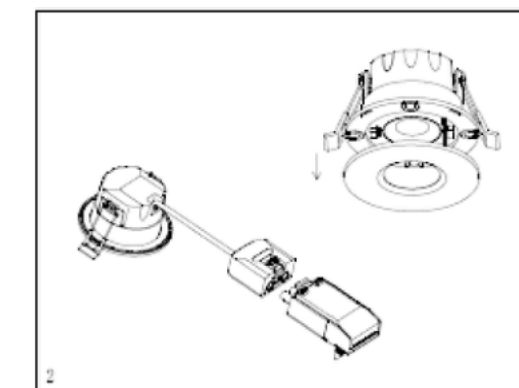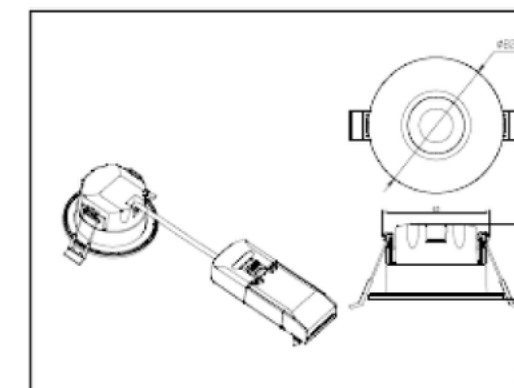

297mm