


SPECIFICATION

Heaton Superior 2

3CCT - 3PWR - Street Light

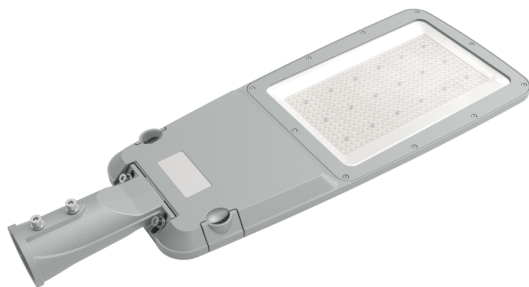

Beam Angle
Type II



Input
100-277V



Life Hours
50,000



Dimmable
Yes



Colour Temperature
2700K 3200K 4000K

Part Number	HES2-150T
Max Power	100W/120W/150W
Max Lumens	25000
Lumens Per Watt	150
Spigot Internal	76mm
Power Factor	>0.95
Dimensions (mm)	797 x 280 x 66

Key Features

- Asymmetric Type II-M Lens: Optimized road beam patterns
- Smart NEMA Socket: Future-proof for smart-city nodes
- Dual-Axis Mounting: Vertical and horizontal pole compatibility
- 10KV Surge Protection: High resilience against lightning strikes
- Flicker-Free Design: Eliminates stroboscopic effects and strain
- Class B Efficiency: Modern, energy-saving power conversion rating
- Pre-Wired 60cm Cable: Fast out-of-the-box electrical setup
- 5-Year Warranty: Long-term security for municipal projects.

IP 66

CRI >70

Please Note: Product specifications are subject to change without notice. Product supplied may differ slightly in appearance from images shown on this website. Diamond LED Lighting reserve the right to update product specifications.

Tel: 01260 292 640 | Fax: 01260 279 116 | E-mail: sales@diamondledlighting.co.uk | Web: www.diamondledlighting.co.uk